

Our Product Range and Sizing Guides



CONTENTS

Why LINIAN?	03
About LINIAN	03
Our Range	04
– FireClip	06
– SuperClip	08
– T&E Clip	10
– Coaxial Clip	12
– Earth Rod Pro Range	14
Product list and Sizing Guides	16
LINIAN Product List	18
– Sample	18
– FireClip Range	18
– SuperClip Range	19
– T&E Clip Range	21
– Coaxial Clip Range	21
– Earth Rod Pro Range	21
– Cable Tie Packs	21
LINIAN Sizing Guides	22
– FP 200 Gold - Fire Alarm Cable	22
– FP 200 Plus - Fire Alarm Enhanced	24
– FP600's - Fire Rated Heavy Duty SWA Power Cable	25
– FP 400 - Fire Rated SWA Cable	26
– PVC Insulated Flex	28
– SWA Armoured Power Cable Standard	31
– SWA Armoured Power Cable LS(H)F	34
– Conduit	37
Specialist Colours	39
SPC UK	40
LINIAN Labs	41

At LINIAN we view the world a little differently. Where some are content to serve the industry as it is, we continually look for ways to drive it forward – to make it faster, safer, simpler.

Through products, like the world's first single component fixing, we solve industry challenges, reduce inefficiencies and raise standards of safety and compliance across the board.

Being family run is at the core of our business. It has allowed us to forge a company-wide culture of honesty, determination and restless innovation that can be seen in everything we do.

WHAT WE DO

At LINIAN, we create British manufactured, innovative, easy-to-install products that save time, money and lives. Our range of 18th Edition compliant cable clips includes the LINIAN FireClip™ – the original single-component fire-rated fixing. Plus, the SuperClip™ – for SWA cables, bunched cables and conduit, the T&E Clip™ – for flat twin, cpc cabling and trunking, and the Coaxial Clip™ – for CCTV, AV and satellite TV installations. In 2021, we launched the NanoClip™ – LINIAN's first innovation-to-order range designed for fibre cables and other small diameter cables.

LINIAN now offers over 115 cable fixing products ensuring a solution to suit thousands of different cable types, with no need for screws, plugs, cleats or shot-fired clips. We also produce innovative solutions for rapid Earth Rod installation – ideal for EV charging units, and our range is expanding to include solutions for the plumbing and DIY installer.

Our research and development team are continually working on new ideas. With innovation and safety at the heart of LINIAN, you can rest assured that we'll be conquering problems you haven't even encountered yet.



OUR RANGE



FIRECLIP™



SUPERCLIP™



T&E CLIP™



COAXIAL CLIP™




EARTH ROD PRO™

The World's First
Single Component
Fire Rated Fixing

FIRECLIP™



- Round cables and PVC Trunking
- Single and double
- Anchor fixings for wire etc.
- Corrosion resistant & UV Stable



FIRECLIP™

For Single or Double
cable applications

70% quicker to install
than traditional methods


18th Edition and
Fire-Rated Cable Fixing,
Safe and Compliant

90 & 120 minute fire
resistant, meeting BSi
and DIN classifications

Smoke emission tested
to London Underground
Standard

>1200 degrees Celsius
melting point

Can be used with mini
trunking alignment

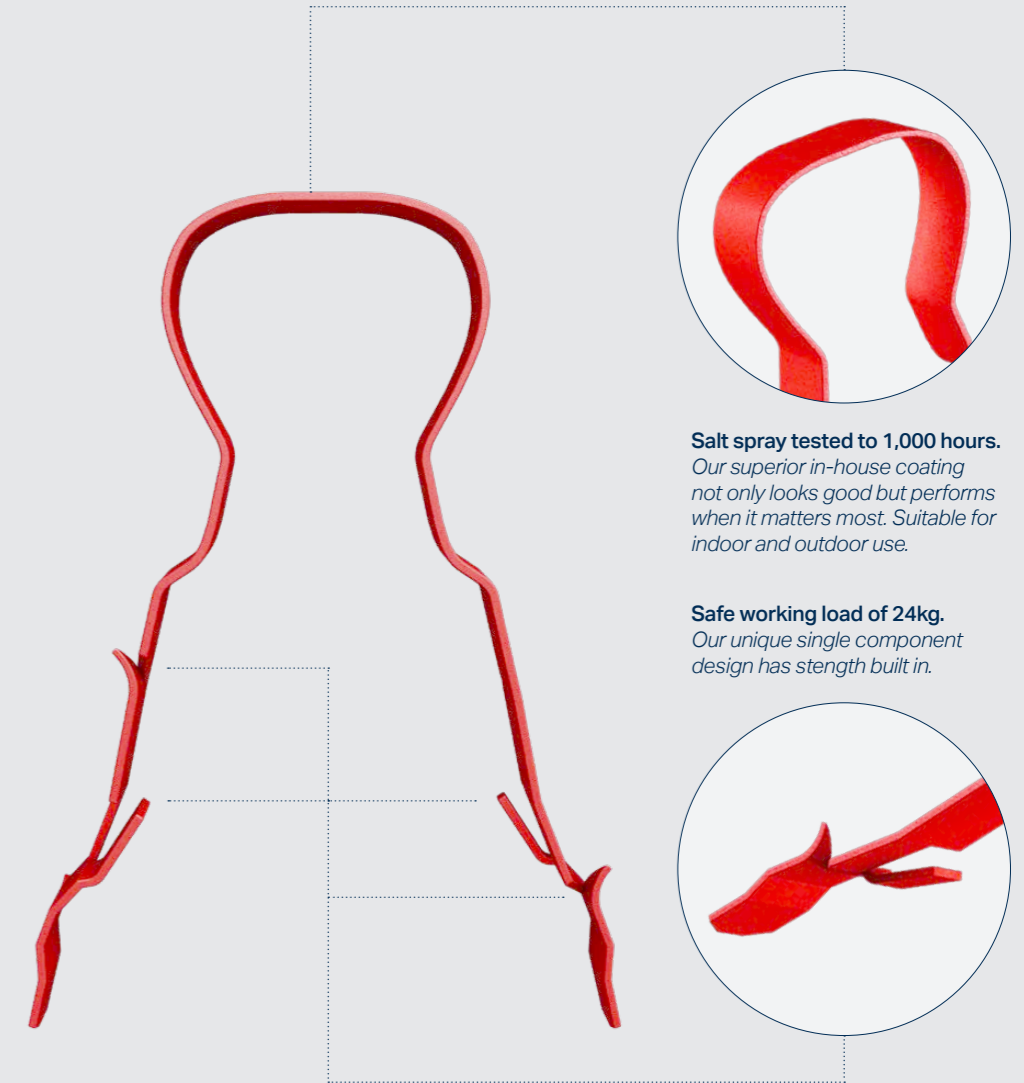

Salt spray tested to 1,000 hours.
Our superior in-house coating
not only looks good but performs
when it matters most. Suitable for
indoor and outdoor use.

Safe working load of 24kg.
Our unique single component
design has strength built in.


FAST AND EASY TO INSTALL

**No need for plugs,
screws and washers**
– just drill your hole,
slide our clip over
the cable, and push
it into the wall.

**Drill a hole in
your substrate.**
We suggest a
Ø6mm hole
at a depth
of 30mm.

**Slide the clip
over the cable.**
Make sure it's
seated in the
rounded area
of the clip.

**Compress and
push it home.**
Pinch the legs
together and
push into the
hole by hand.

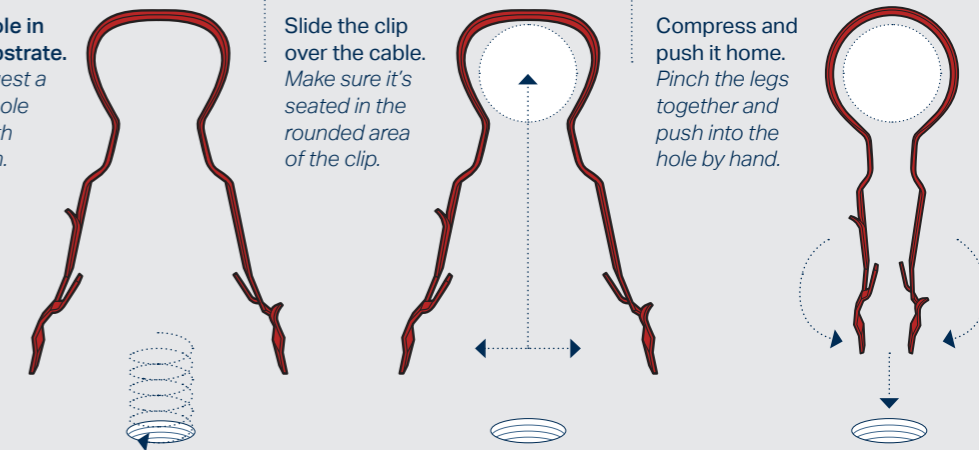

THE INDUSTRY STANDARD

**Fast becoming the
industry standard**
– FireClip™ meets
all current industry
regulations, and
surpasses a few too.

British Standards:
– BS7671: Amendment 3
– BS7671: 18th Edition 2018
– BSEN50200 PH120
– BS8519: 2010


European Standards:
– DIN 4102-12 E90

4mm — 14mm
Soft skin, flex and round
cables. Single and Doubles.

Versatile
Can hold cable from Ø4mm up to
Ø14mm. Available in a variety of
colours including Red, Black or White.




Our Strongest Single Component Fixing

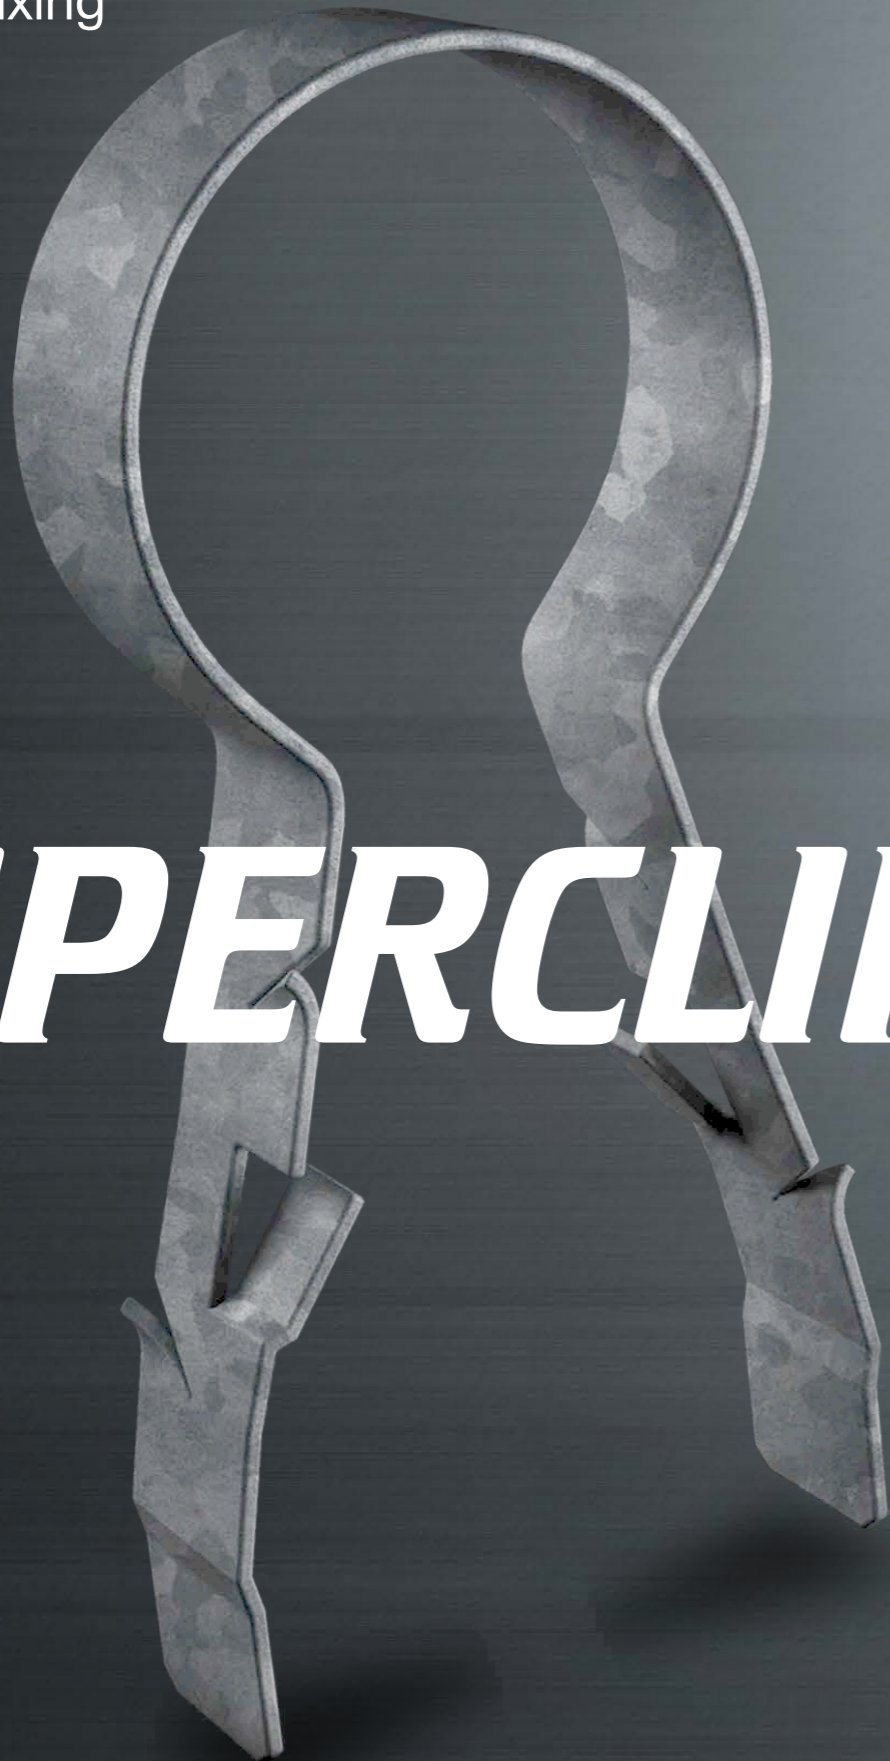

SUPERCLIP™

- SWA cables, PVC/metal conduit
- Bunched cables
- Anchor fixings for wire etc.
- Corrosion resistant & UV Stable
- Can be used with steel cable ties



SUPERCLIP™

Suitable for SWA Cable, Conduit and bunched cables for neat cable installation

Anchor fixings for wire and bunched cable


70% quicker to install than traditional methods

90 & 120 minute fire resistant, meeting BSi and DIN classifications

Corrosion resistant and UV stable, suitable for indoor and outdoor use

18th Edition and Fire-Rated Cable Fixings, Safe and Compliant

No need for conduit saddles

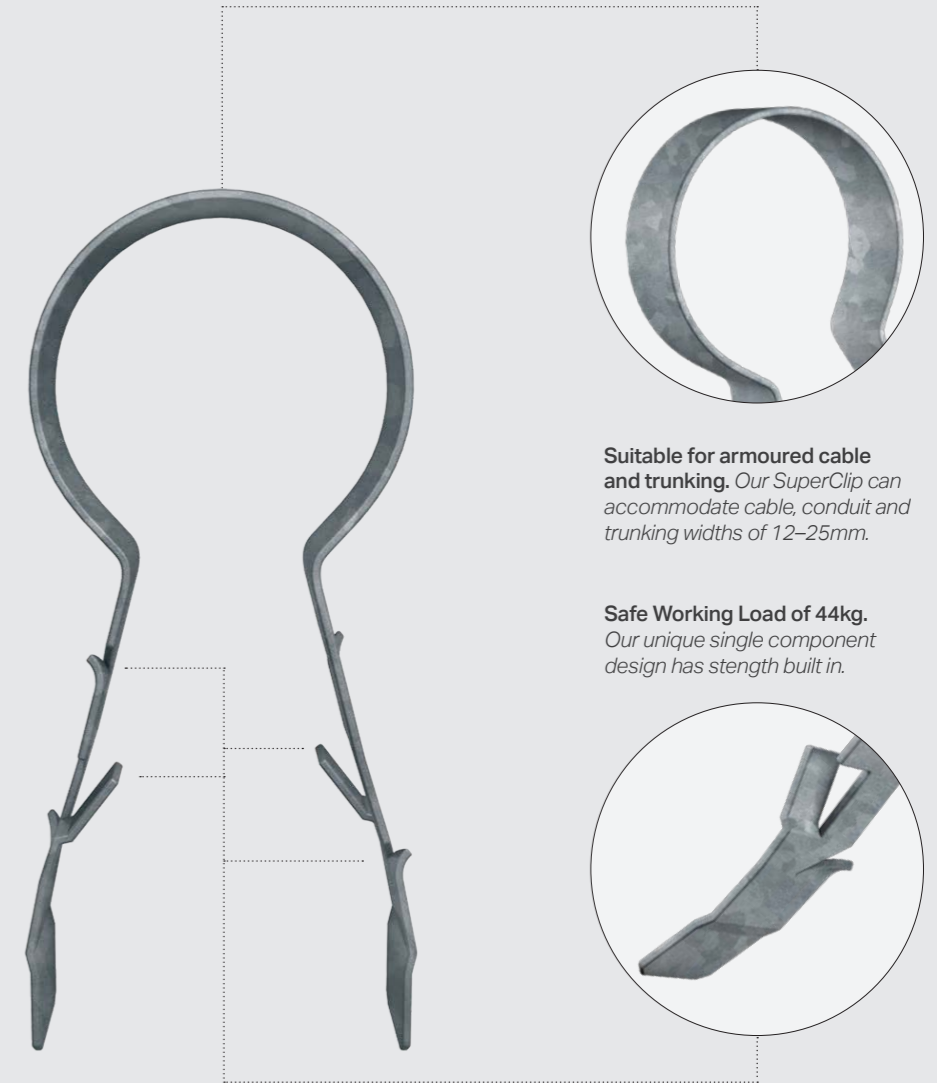

Suitable for armoured cable and trunking. Our SuperClip can accommodate cable, conduit and trunking widths of 12–25mm.

Safe Working Load of 44kg. Our unique single component design has strength built in.


FAST AND EASY TO INSTALL

No need for plugs, screws, washers conduit saddles or plastic/aluminum cleats – just drill your hole, slide our clip over the cable, and push it into the wall.


Drill a hole in your substrate. We suggest a Ø10mm hole at a depth of 40mm.



Slide the clip over the cable. Make sure it's seated in the rounded area of the clip.

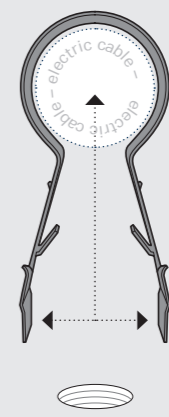

Compress and push it home. Pinch the legs together and push into the hole by hand.

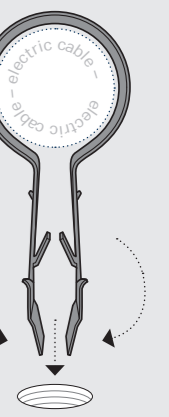


THE INDUSTRY STANDARD

Fast becoming the industry standard – SuperClip™ meets all current industry regulations, and surpasses a few too.

British Standards:
 - BS7671: Amendment 3
 - BS7671: 18th Edition 2018
 - BSEN50200 PH120
 - BS8519: 2010

European Standards:
 - DIN 4102-12 E90

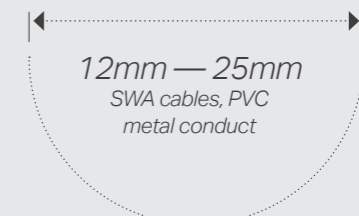

Versatile
 Can hold cable conduit and armoured (SWA) from Ø12mm up to Ø25mm. Available in a variety of colours including Red, Black, White or Galvanised.




The Most Versatile
Way to Install and
secure T&E Cables

T&E CLIP™



- Twin, cpc cabling and PVC trunking
- Anchor fixings for wire etc.
- Corrosion resistant & UV Stable



T&E CLIP™


Suitable for twin, cpc cabling and PVC trunking

Anchor fixings for wire and bunched cable

18th Edition and Fire-Rated Cable Fixings, Safe and Compliant

90 & 120 minute fire resistant, meeting BSi and DIN classifications

Corrosion resistant and UV stable, suitable for indoor and outdoor use

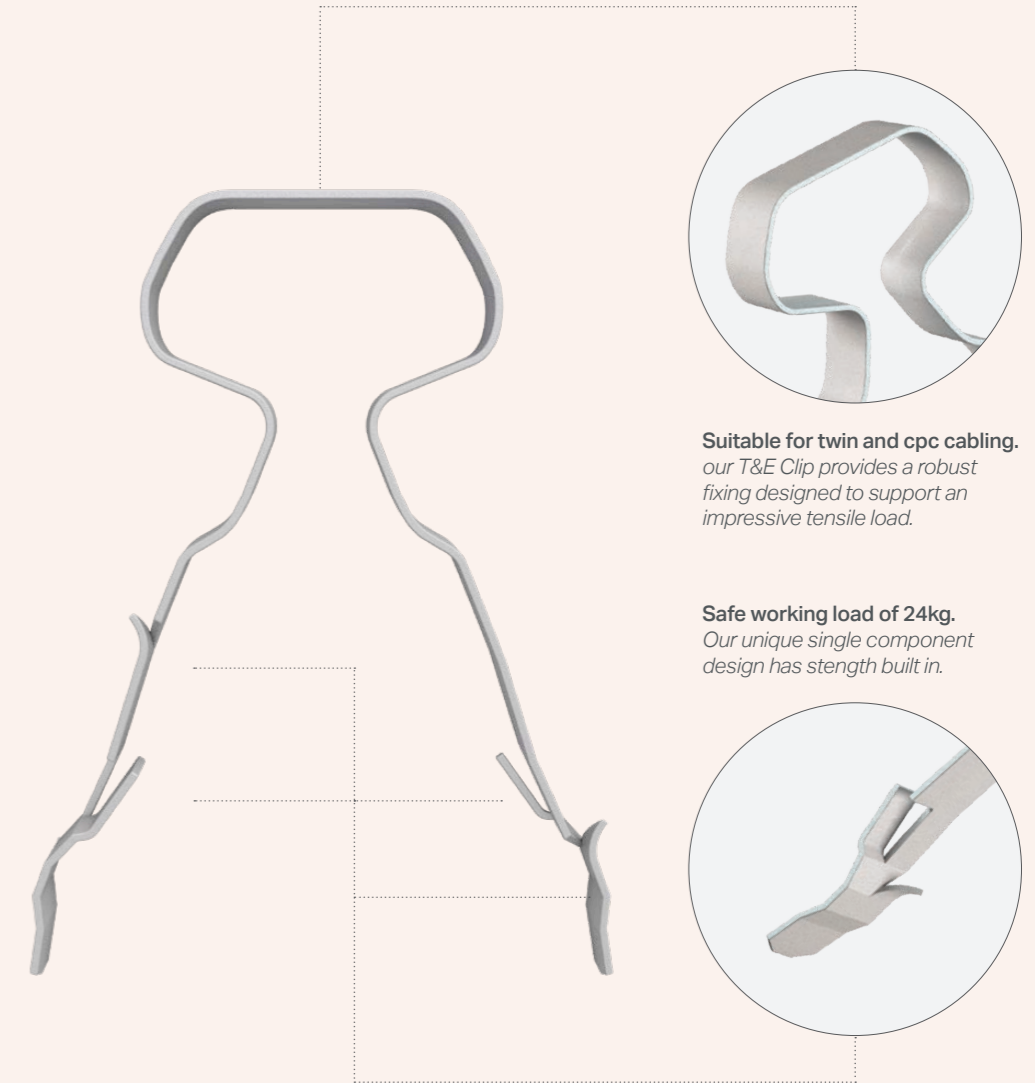


Suitable for twin and cpc cabling.
our T&E Clip provides a robust fixing designed to support an impressive tensile load.

Safe working load of 24kg.
Our unique single component design has strength built in.


FAST AND EASY TO INSTALL

No need for plugs, screws, washers or nail in clips – just drill your hole, slide our clip over the cable, and push it into the wall.


Drill a hole in your substrate.
We suggest a Ø6mm hole at a depth of 30mm.

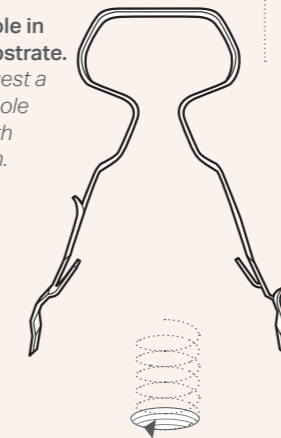

Slide the clip over the cable.
Make sure it's seated in the rounded area of the clip.

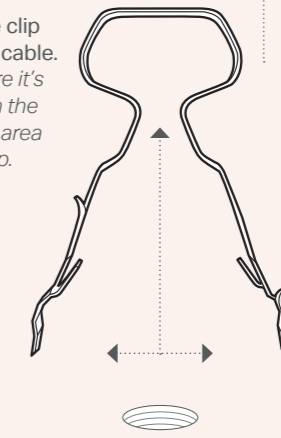

Compress and push it home.
Pinch the legs together and push into the hole by hand.

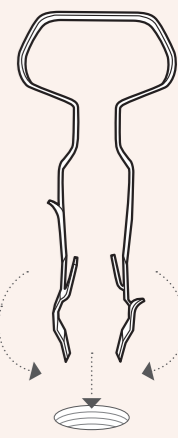

THE INDUSTRY STANDARD

Fast becoming the industry standard
– T&E Clip™ meets all current industry regulations, and surpasses a few too.

British Standards:
– BS7671: Amendment 3
– BS7671: 18th Edition 2018
– BSEN50200 PH120
– BS8519: 2010

European Standards:
– DIN 4102-12 E90

1mm — 10mm
Flat Twin & Earth Cable
(624Y Twin & Earth PVC Cable BS6004)

Versatile
Can hold cable from Ø1mm upto Ø10mm. Available in grey or white.




The Fastest Way to Install Coaxial Cables

COAXIAL CLIP™



- For CCTV, AV and Satellite TV installations
- For indoor and outdoor use
- Corrosion resistant & UV Stable



COAXIAL CLIP™


To suit RG59 Coaxial 'Shotgun' Cabling

Quick instalation for CCTV, AV and Satellite TV installations

18th Edition and Fire-Rate Cable Fixing, Safe and Compliant

90 & 120 minute fire resistant, meeting BSi and DIN classifications

Corrosion resistant and UV stable, suitable for indoor and outdoor use

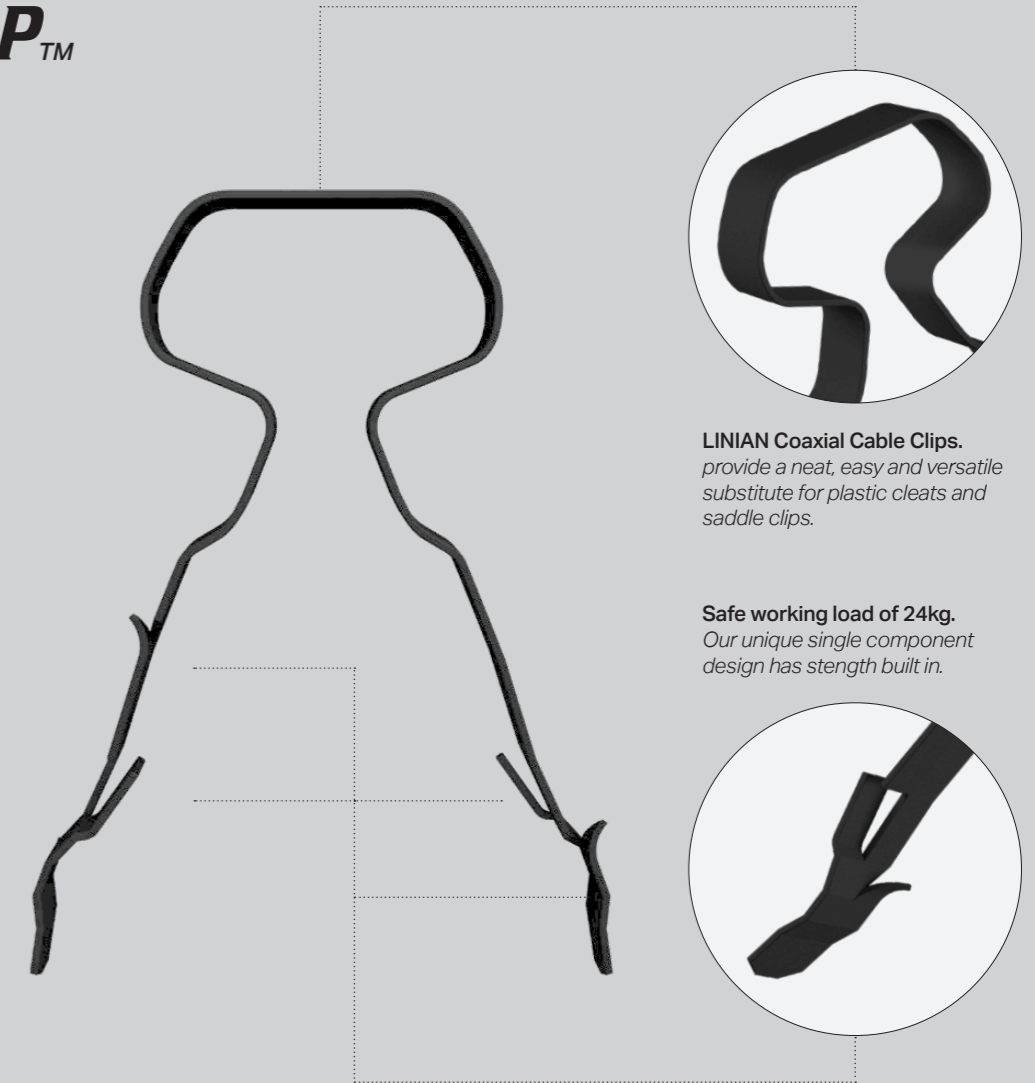

LINIAN Coaxial Cable Clips. provide a neat, easy and versatile substitute for plastic cleats and saddle clips.

Safe working load of 24kg. Our unique single component design has strength built in.


FAST AND EASY TO INSTALL

No need for plugs, screws and washers – just drill your hole, slide our clip over the cable, and push it into the wall.

Drill a hole in your substrate. We suggest a Ø6mm hole at a depth of 30mm.

Slide the clip over the cable. Make sure it's seated in the rounded area of the clip.

Compress and push it home. Pinch the legs together and push into the hole by hand.

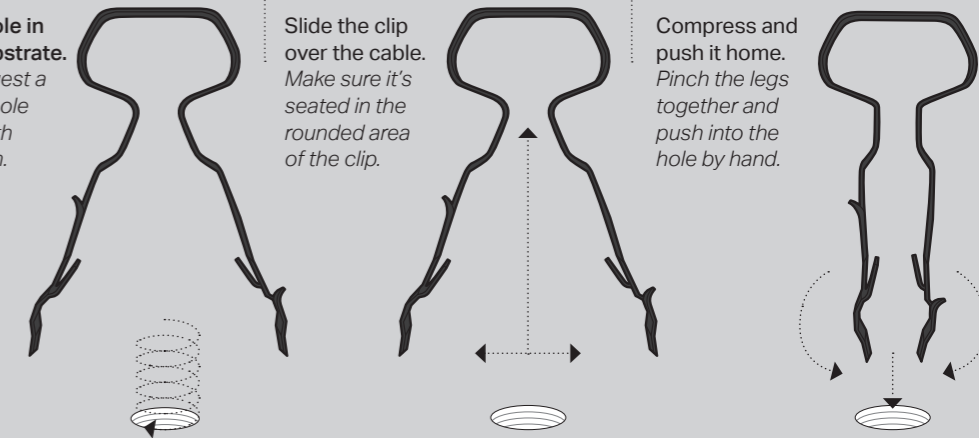


THE INDUSTRY STANDARD

Fast becoming the industry standard – Coaxial Clip™ meets all current industry regulations, and surpasses a few too.

British Standards:
 - BS7671: Amendment 3
 - BS7671: 18th Edition 2018
 - BSEN50200 PH120
 - BS8519: 2010

European Standards:
 - DIN 4102-12 E90



Versatile Can hold cable from Ø6mm upto Ø13mm. Available in Black and white.



EARTH ROD PRO™

For rapid Earth Rod installation

EARTH ROD PRO RANGE™

Threads onto any standard earth rod

Bores through hard top layers and underground rock

EARTH ROD MAX DRIVER
Attaches to your SDS drill

EARTH ROD PRO DRIVER
Attaches to your SDS drill

EARTH ROD DRILL BIT
Attaches directly to the earth rod

SPECIFICATIONS

Quality Standard:
All parts are produced in UK manufacturing facilities with an approved, certified Quality Management System compliant with ISO 901:2015.

Threads:
All parts made concurrently on state of the art sliding head lathes to ensure perfect compatibility of 5/8" BSW threads with copper earth rods.

Heat treatment:
Through-hardened to 45-55 HRC Rockwell, Strikes the perfect balance of toughness in hammer drilling applications.

Brazing:
Copper-brazing carbide tips at 1100 degrees Celsius to ensure an ultra-strong bond between tip and steel for extreme durability in the toughest drilling applications.

Carbide Tip Specification: *European sourced 'Hammer-grade' Tungsten carbide tip designed to withstand hammer blows into the hardest of masonry substrates.*


Earth Rod Drill Bit
Standard Tip also available (without Carbide) for fast, economical installation into softer substrates.

Drive Shanks:
Both our drive shanks are made to Bosch license specifications.

Steel Specification:
High alloy content, chromium, nickel, molybdenum European steel.

FAST AND EASY TO INSTALL

Remove your chosen Driver and Drill Bit from the packaging.






Turn the Driver and Drill Bit onto each end of the earth rod and Insert the Driver into the SDS or SDS Max chuck.

You can apply some grease to the shafts for easier removal.



Using the SDS drill, drive the rod into the substrate to the required depth.

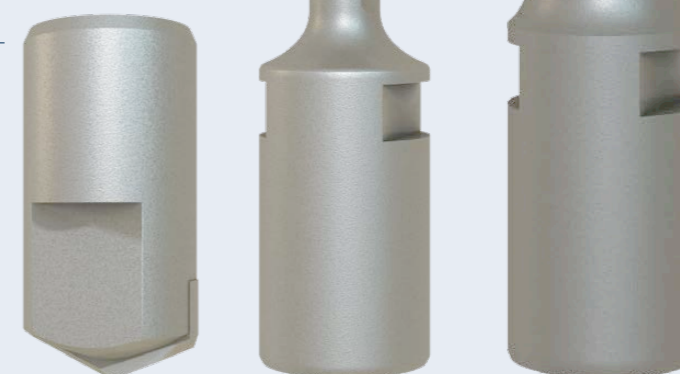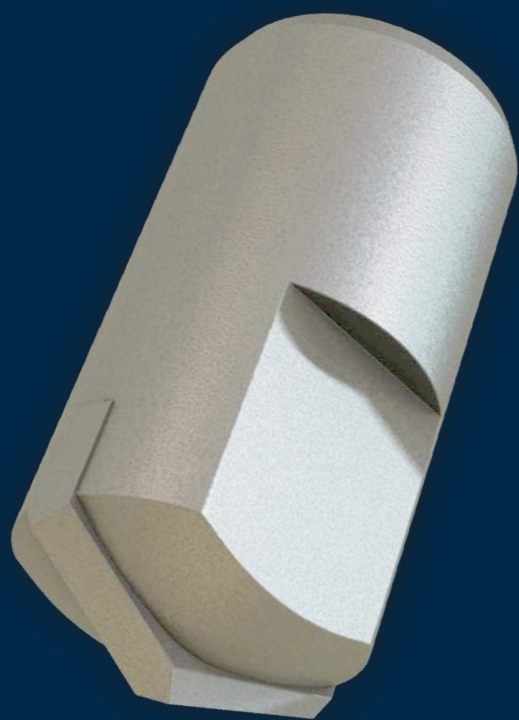

EARTH ROD

PRODUCT LIST AND SIZING GUIDE

Using LINIAN clips are the faster, safer way to fit conduit, trunking and cables.

LINIAN Clips are suitable for use in the following substrates:

Plasterboard (Pull-out load reduced to 5kg.)

Masonry

Light Block

Heavy Block

Hollow Block

Hollow Brick

Brick

Concrete

Timber

Stone



Save Time
Faster to install with no compromise on aesthetics



Save Lives
All LINIAN products are fire-rated, responsibly coated and certified



Save Money
Faster installation cuts labour costs


LINIAN Product List

Part Number	Product Description	UOM
SAMPLES		
1SAMPLE	LINIAN Mini Sample Pack - Mixed Selection (Eg. 1LTEG001, 1LCB9112, 1LCR608, 1LSW2325). Contents may vary.	4
1COAXSAMPLE	LINIAN Mini Sample Pack - Coaxial Selection (1LCABT004, 1LCAWT004). Contents may vary.	4
1GALVSAMPLE	LINIAN Mini Sample Pack - Galvanised Selection (Eg. 1LSGALV1820, 1LSGALV2020, 1LSGALV2325). Contents may vary.	3
1CPSAMPLE	LINIAN Mini Sample Pack - Copper Selection. Contents may vary.	3

FIRECLIP RANGE

1LCB406	LINIAN FireClip, Single, Black 4-6mm (1LCB406)(CC3)	100
1LCR406	LINIAN FireClip, Single, Red, 4-6mm (1LCR406)(CC3)	100
1LCW406	LINIAN FireClip, Single, White, 4-6mm (1LCW406)(CC3)	100
1LCC406	LINIAN FireClip, Single, Cream, 4-6mm (1LCC406)(CC3)	100
1LCCP406	LINIAN FireClip, Single, Copper, 4-6mm (1LCCP406)(CC3)	100
1LCO406	LINIAN FireClip, Single, Orange, 4-6mm (1LCO406)(CC3)	100
1LCP406	LINIAN FireClip, Single, Purple, 4-6mm (1LCP406)(CC3)	100
1LCBR406	LINIAN FireClip, Single, Brown, 4-6mm (1LCBR406)(CC3)	100
1LCB608	LINIAN FireClip, Single, Black, 6-8mm (1LCB608)(CC4)	100
1LCR608	LINIAN FireClip, Single, Red, 6-8mm (1LCR608)(CC4)	100
1LCW608	LINIAN FireClip, Single, White, 6-8mm (1LCW608)(CC4)	100
1LCC608	LINIAN FireClip, Single, Cream, 6-8mm (1LCC608)(CC4)	100
1LCCP608	LINIAN FireClip, Single, Copper, 6-8mm (1LCCP608)(CC4)	100
1LCO608	LINIAN FireClip, Single, Orange, 6-8mm (1LCO608)(CC4)	100
1LCP608	LINIAN FireClip, Single, Purple, 6-8mm (1LCP608)(CC4)	100
1LCY608	LINIAN FireClip, Single, Yellow, 6-8mm (1LCY608)(CC4)	100
1LCBR608	LINIAN FireClip, Single, Brown, 6-8mm (1LCBR608)(CC4)	100
1LCGR608	LINIAN FireClip, Single, Green, 6-8mm (1LCGR608)(CC4)	100
1LCB682	LINIAN FireClip, Double, Black, 6-8mm (1LCB682)(CC4x2)	100
1LCR682	LINIAN FireClip, Double, Red, 6-8mm (1LCR682)(CC4x2)	100
1LCW682	LINIAN FireClip, Double, White, 6-8mm (1LCW682)(CC4x2)	100
1LCC682	LINIAN FireClip, Double, Cream, 6-8mm (1LCC682)(CC4x2)	100
1LCCP682	LINIAN FireClip, Double, Copper, 6-8mm (1LCCP682)(CC4x2)	100
1LCO682	LINIAN FireClip, Double, Orange, 6-8mm (1LCO682)(CC4x2)	100
1LCP682	LINIAN FireClip, Double, Purple, 6-8mm (1LCP682)(CC4x2)	100
1LCY682	LINIAN FireClip, Double, Yellow, 6-8mm (1LCY682)(CC4x2)	100
1LCB911	LINIAN FireClip, Single, Black 9-11mm (1LCB911)(CC5)	100
1LCR911	LINIAN FireClip, Single, Red, 9-11mm (1LCR911)(CC5)	100
1LCW911	LINIAN FireClip, Single, White, 9-11mm (1LCW911)(CC5)	100
1LCC911	LINIAN FireClip, Single, Cream, 9-11mm (1LCC911)(CC5)	100
1LCCP911	LINIAN FireClip, Single, Copper, 9-11mm (1LCCP911)(CC5)	100
1LCO911	LINIAN FireClip, Single, Orange, 9-11mm (1LCO911)(CC5)	100
1LCP911	LINIAN FireClip, Single, Purple, 9-11mm (1LCP911)(CC5)	100


Part Number	Product Description	UOM
FIRECLIP RANGE		
1LCBLU911	LINIAN FireClip, Single, Blue, 9-11mm (1LCBLU911)(CC5)	100
1LCY911	LINIAN FireClip, Single, Yellow, 9-11mm (1LCY911)(CC5)	100
1LCBR911	LINIAN FireClip, Single, Brown, 9-11mm (1LCBR911)(CC5)	100
1LCGR911	LINIAN FireClip, Single, Green, 9-11mm (1LCGR911)(CC5)	100
1LCB9112	LINIAN FireClip, Double, Black, 9-11mm (1LCB9112)(CC5x2)	100
1LCR9112	LINIAN FireClip, Double, Red, 9-11mm (1LCR9112)(CC5x2)	100
1LCW9112	LINIAN FireClip, Double, White, 9-11mm (1LCW9112)(CC5x2)	100
1LCC9112	LINIAN FireClip, Double, Cream, 9-11mm (1LCC9112)(CC5x2)	100
1LCCP9112	LINIAN FireClip, Double, Copper, 9-11mm (1LCCP9112)(CC5x2)	100
1LCO9112	LINIAN FireClip, Double, Orange, 9-11mm (1LCO9112)(CC5x2)	100
1LCP9112	LINIAN FireClip, Double, Purple, 9-11mm (1LCP9112)(CC5x2)	100
1LCBLU9112	LINIAN FireClip, Double, Blue, 9-11mm (1LCBLU9112)(CC5x2)	100
1LCY9112	LINIAN FireClip, Double, Yellow, 9-11mm (1LCY9112)(CC5x2)	100
1LCGALV9112	LINIAN FireClip, Double, Galvanised, 9-11mm (1LCGALV9112)(CC5x2)	100
1LCW1114	LINIAN FireClip, Single, White, 11-14mm (1LCCW1114)(CC6)	100
1LCR1114	LINIAN FireClip, Single, Red, 11-14mm (1LCR1114)(CC6)	100
1LCB1114	LINIAN FireClip, Single, Black, 11-14mm (1LCB1114)(CC6)	100
1LCBR114	LINIAN FireClip, Single, Brown, 11-14mm (1LCBR1114)(CC6)	100

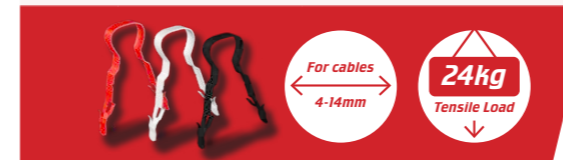

SUPERCLIP RANGE

1LSB1214	LINIAN SuperClip, Black, 12-14mm (1LSB1214)(CC6)	25
1LSR1214	LINIAN SuperClip, Red, 12-14mm (1LST1214)(CC6)	25
1LSW1214	LINIAN SuperClip, White, 12-14mm (1LSW1214)(CC6)	25
1LSC1214	LINIAN SuperClip, Cream, 12-14mm (1LSC1214)(CC6)	25
1LSCP1214	LINIAN SuperClip, Copper, 12-14mm (1LSCP1214)(CC6)	25
1LSO1214	LINIAN SuperClip, Orange, 12-14mm (1LSO1214)(CC6)	25
1LSP1214	LINIAN SuperClip, Purple, 12-14mm (1LSP1214)(CC6)	25
1LSY1214	LINIAN SuperClip, Yellow, 12-14mm (1LSY1214)(CC6)	25
1LSBR1214	LINIAN SuperClip, Brown, 12-14mm (1LSBR1214)(CC6)	25
1LSB1518	LINIAN SuperClip, Black, 15-18mm (1LSB1518)(CC7)	25
1LSR1518	LINIAN SuperClip, Red, 15-18mm (1LSR1518)(CC7)	25
1LSW1518	LINIAN SuperClip, White, 15-18mm (1LSW1518)(CC7)	25
1LSC1518	LINIAN SuperClip, Cream, 15-18mm (1LSC1518)(CC7)	25
1LSCP1518	LINIAN SuperClip, Copper, 15-18mm (1LSCP1518)(CC7)	25
1LSO1518	LINIAN SuperClip, Orange, 15-18mm (1LSO1518)(CC7)	25
1LSP1518	LINIAN SuperClip, Purple, 15-18mm (1LSP1518)(CC7)	25
1LSY1518	LINIAN SuperClip, Yellow, 15-18mm (1LSY1518)(CC7)	25
1LSB1820	LINIAN SuperClip, Black, 18-20mm (1LSB1820)(CC8)	25


Part Number	Product Description	UOM
SUPERCLIP RANGE		
1LSR1820	LINIAN SuperClip, Red, 18-20mm (1LSR1820)(CC8)	25
1LSW1820	LINIAN SuperClip, White, 18-20mm (1LSW1820)(CC8)	25
1LSGALV1820	LINIAN SuperClip, Galv, 18-20mm (1LSGALV1820)(CC8)	25
1LSC1820	LINIAN SuperClip, Cream, 18-20mm (1LSC1820)(CC8)	25
1LSCP1820	LINIAN SuperClip, Copper, 18-20mm (1LSCP1820)(CC8)	25
1LSO1820	LINIAN SuperClip, Orange, 18-20mm (1LSO1820)(CC8)	25
1LSP1820	LINIAN SuperClip, Purple, 18-20mm (1LSP1820)(CC8)	25
1LSY1820	LINIAN SuperClip, Yellow, 18-20mm (1LSY1820)(CC8)	25
1LSB2022	LINIAN SuperClip, Black, 20-22mm (1LSB2022)(CC9)	25
1LSR2022	LINIAN SuperClip, Red, 20-22mm (1LSR2022)(CC9)	25
1LSW2022	LINIAN SuperClip, White, 20-22mm (1LSW2022)(CC9)	25
1LSGALV2022	LINIAN SuperClip, Galv, 20-22mm (1LSGALV2022)(CC9)	25
1LSC2022	LINIAN SuperClip, Cream, 20-22mm (1LSC2022)(CC9)	25
1LSCP2022	LINIAN SuperClip, Copper, 20-22mm (1LSCP2022)(CC9)	25
1LSO2022	LINIAN SuperClip, Orange, 20-22mm (1LSO2022)(CC9)	25
1LSP2022	LINIAN SuperClip, Purple, 20-22mm (1LSP2022)(CC9)	25
1LSY2022	LINIAN SuperClip, Yellow, 20-22mm (1LSY2022)(CC9)	25
1LSB2325	LINIAN SuperClip, Black, 23-25mm (1LSB2325)(CC10)	25
1LSR2325	LINIAN SuperClip, Red, 23-25mm (1LSR2325)(CC10)	25
1LSW2325	LINIAN SuperClip, White, 23-25mm (1LSW2325)(CC10)	25
1LSGALV2325	LINIAN SuperClip, Galv, 23-25mm (1LSGALV2325)(CC10)	25
1LSC2325	LINIAN SuperClip, Cream, 23-25mm (1LSC2325)(CC10)	25
1LSCP2325	LINIAN SuperClip, Copper, 23-25mm (1LSCP2325)(CC10)	25
1LSO2325	LINIAN SuperClip, Orange, 23-25mm (1LSO2325)(CC10)	25
1LSP2325	LINIAN SuperClip, Purple, 23-25mm (1LSP2325)(CC10)	25
1LSY2325	LINIAN SuperClip, Yellow, 23-25mm (1LSY2325)(CC10)	25



T&E RANGE


1LTEG001	LINIAN T & E Clip, Grey, 1mm (1LTEG001)	100
1LTEW001	LINIAN T & E Clip, White, 1mm (1LTEW001)	100
1LTEG001.5	LINIAN T & E Clip, Grey, 1.5mm (1LTEG001.5)	100
1LTEW001.5	LINIAN T & E Clip, White, 1.5mm (1LTEW001.5)	100
1LTEG002.5	LINIAN T & Clip, Grey, 2.5mm (1LTEG002.5)	100
1LTEW002.5	LINIAN T & E Clip, White, 2.5mm (1LTEW002.5)	100
1LTEG004	LINIAN T & E Clip, Grey, 4mm (1LTEG004)	100
1LTEW004	LINIAN T & E Clip, White, 4mm (1LTEW004)	100
1LTEG006	LINIAN T & E Clip, Grey, 6mm (1LTEG006)	100
1LTEW006	LINIAN T & E Clip, White, 6mm (1LTEW006)	100

Part Number	Product Description	UOM
T&E RANGE		
1LTEG010	LINIAN T & E Clip, Grey, 10mm (1LTEG010)	100
1LTEW010	LINIAN T & E Clip, White, 10mm (1LTEW010)	100



COAXIAL RANGE

1LCABT004	LINIAN RG59 Coaxial Cable Clip (Shotgun), Black, 4mm (1LCABT004)	100
1LCAWT004	LINIAN RG59 Coaxial Cable Clip (Shotgun), White, 4mm (1LCAWT004)	100




EARTH PRO

1LERPD	LINIAN Earth Rod Pro Driver (SDS+)	1
1LERPM	LINIAN Earth Rod Pro Max Driver	1
1LERPB	LINIAN Earth Rod Pro Bit	1
1LERPB5	LINIAN Earth Rod Pro Bit, Carbide Tip (Pack x 5)	5
1LERPB10	LINIAN Earth Rod Pro Bit, Carbide Tip (Pack x 10)	10
1LERPB25	LINIAN Earth Rod Pro Bit Carbide Tip (Pack x 25)	25



NANOCLIP RANGE

1LCW002	LINIAN NanoClip, White, 2mm (1LCW002)	100
1LCW003	LINIAN NanoClip, White, 3mm (1LCW003)	100
1LCB002	LINIAN NanoClip, Black, 2mm (1LCB002)	100
1LCB003	LINIAN NanoClip, Black, 3mm (1LCB003)	100
1LCBR002	LINIAN NanoClip, Brown, 2mm (1LCBR002)	100
1LCBR003	LINIAN NanoClip, Brown, 3mm (1LCBR003)	100



CABLE TIE PACKS

2LCG0911CT300	LINIAN CABLE TIE PACK, 10 x FireClips (1LCGALV911, 9-11mm), 10 x Steel Cable Ties (300 x 4.8 A316 S/S)	20
2LSCG01518CT300	LINIAN Super Strength CABLE TIE PACK, 10 x SuperClips (1LSGALV1518, 15-18mm), 10 x Steel Cable Ties (300 x 4.8 A316 S/S)	20

Standard Fire Rated Soft Skin Cable

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
2 CORE			
1mm ²	8mm	6-8mm Single (x1 cable) OR 6-8mm Double (x2 cables)	1LC(X)608 OR 1LC(X)682
1.5mm ²	8.1mm	6-8mm Single (x1 cable) OR 6-8mm Double (x2 cables)	1LC(X)608 OR 1LC(X)682
2.5mm ²	9.5mm	9-11mm Single (x1 cable) OR 9-11mm Double (x 2 cable)	1LC(X)911 OR 1LC(X)9112
4mm ²	11.6mm	9-11mm Single (x1 cable) OR 9-11mm Double (x2 cable)	1LC(X)911 OR 1LC(X)9112
3 CORE			
1mm ²	8.2mm	6-8mm Single (x1 cable) OR 6-8mm Double (x2 cables)	1LC(X)608 OR 1LC(X)682
1.5mm ²	8.4mm	6-8mm Single (x1 cable) OR 6-8mm Double (x2 cables)	1LC(X)608 OR 1LC(X)682
2.5mm ²	10.4mm	9-11mm Single (x1 cable) OR 9-11mm Double (x2 cable)	1LC(X)911 OR 1LC(X)9112
4mm ²	12.3mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4 CORE			
1mm ²	8.5mm	6-8mm Single (x1 cable) OR 6-8mm Double (x2 cables)	1LC(X)608 OR 1LC(X)682
1.5mm ²	10mm	9-11mm Single (x1 cable) OR 9-11mm Double (x2 cable)	1LC(X)911 OR 1LC(X)9112
2.5mm ²	11.9mm	9-11mm Double	1LC(X)9112
4mm ²	13.5mm	12-14mm SuperClip (single cable only)	1LS(X)1214

Standard Fire Rated Soft Skin Cable

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
7 CORE			
1mm ²	12.1mm	12-14mm SuperClip (single cable only)	1LS(X)1214
1.5mm ²	13.3mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm ²	16.3mm	15-18mm SuperClip (single cable only)	1LS(X)1518
12 CORE			
1.5mm ²	17.5mm	15-18mm SuperClip (single cable only)	1LS(X)1518
2.5mm ²	21.7mm	20-22mm SuperClip (single cable only)	1LS(X)2022
19 CORE			
1.5mm ²	20.5mm	20-22mm SuperClip (single cable only)	1LS(X)2022

Enhanced Fire Rated Soft Skin Cable

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
2 CORE			
1.5mm ²	9.5mm	9-11mm Single (x1 cable) OR 9-11mm Double (x2 cable)	1LC(X)911 OR 1LC(X)9112
2.5mm ²	11.5mm	9-11mm Single (x1 cable) OR 9-11mm Double (x2 cable)	1LC(X)911 OR 1LC(X)9112
4mm ²	12.2mm	12-14mm SuperClip (single cable only)	1LS(X)1214
3 CORE			
1.5mm ²	11.7mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm ²	12.7mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm ²	14mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4 CORE			
1.5mm ²	12.5mm	9-11mm Single (x1 cable) OR 9-11mm Double (x2 cable)	1LC(X)911 OR 1LC(X)9112
2.5mm ²	13.5mm	9-11mm Double	1LC(X)9112
4mm ²	14.7mm	12-14mm SuperClip (single cable only)	1LS(X)1214

Fire Rated Heavy Duty SWA Power Cable

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
2 CORE			
4mm ²	21mm	20-22mm SuperClip (single cable only)	1LC(X)2022
6mm ²	21mm	20-22mm SuperClip (single cable only)	1LC(X)2022
10mm ²	23mm	23-25mm SuperClip (single cable only)	1LS(X)2325
16mm ²	25mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
3 CORE			
4mm ²	22mm	20-22mm SuperClip (single cable only)	1LC(X)2022
6mm ²	21mm	20-22mm SuperClip (single cable only)	1LC(X)2022
10mm ²	25mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
4 CORE			
4mm ²	13.9mm	12-14mm SuperClip (single cable only)	1LC(X)2022
6mm ²	15.5mm	15-18mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
5 CORE			
4mm ²	24mm	23-25mm SuperClip (single cable only)	1LC(X)2325
6mm ²	24mm	23-25mm SuperClip (single cable only)	1LC(X)2325
NB: for larger diameter cables - larger clips are under development			

Fire Rated SWA cable

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
2 CORE SWA			
1.5mm ²	13.5mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm ²	14.8mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm ²	15.8mm	15-18mm SuperClip (Single cable only)	1LS(X)1518
6mm ²	16.6mm	15-18mm SuperClip (Single cable only)	1LS(X)1518
10mm ²	19.9mm	18-20mm SuperClip (Single cable only)	1LS(X)1518
16mm ²	22mm	20-22mm SuperClip (Single cable only)	1LC(X)2022
25mm ²	26mm	23-25mm SuperClip (single cable only)	1LS(X)2325
3 CORE			
1.5mm ²	13.9mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm ²	15.5mm	15-18mm SuperClip (Single cable only)	1LS(X)1518
4mm ²	16.4mm	15-18mm SuperClip 3(Single cable only)	1LS(X)1518
6mm ²	17.9mm	15-18mm SuperClip (Single cable only)	1LS(X)1518
10mm ²	22mm	20-22mm SuperClip (Single cable only)	1LC(X)2022
16mm ²	24mm	23-25mm SuperClip (single cable only)	1LS(X)2325

Fire Rated SWA cable

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
4 CORE			
1.5mm ²	19.9mm	18-20mm SuperClip (single cable only)	1LC(X)1820
2.5mm ²	16.9mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm ²	17.7mm	15-18mm SuperClip (single cable only)	1LS(X)1518
6mm ²	21mm	20-22mm SuperClip (single cable only)	1LC(X)2022
10mm ²	24mm	23-25mm SuperClip (single cable only)	1LC(X)2325
16mm ²	25mm	23-25mm SuperClip (single cable only)	1LC(X)2325
25mm ²	26mm	23-25mm SuperClip (single cable only)	1LS(X)2325
5 CORE			
1.5mm ²	15.6mm	15-18mm SuperClip (single cable only)	1LS(X)1518
2.5mm ²	17.3mm	15-18mm SuperClip (single cable only)	1LS(X)1518
4mm ²	18.8mm	18-20mm SuperClip (single cable only)	1LC(X)1820
6mm ²	23mm	23-25mm SuperClip (single cable only)	1LC(X)2325
10mm ²	25mm	23-25mm SuperClip (single cable only)	1LC(X)2325

NB: for larger diameter cables - larger clips are under development

PVC Insulated Flex

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
218Y PVC 2 CORE			
0.5mm ²	5.2mm	4-6mm Single (9-11mm single 2 cables)	1LC(X)406 (1LC(X)911
0.75mm ²	5.6mm	4-6mm Single (9-11mm single 2 cables)	1LC(X)406 (1LC(X)911
218Y PVC 3 CORE			
0.5mm ²	5.6mm	4-6mm Single (9-11mm single 2 cables)	1LC(X)406 (1LC(X)911
0.75mm ²	5.5mm	4-6mm Single (9-11mm single 2 cables)	1LC(X)406 (1LC(X)911
0.75mm ²	5.6mm	4-6mm Single (9-11mm single 2 cables)	1LC(X)406 (1LC(X)911
2.5mm ²	17.05mm	15-18mm SuperClip (single cable only)	1LS(X)1518
NB: for larger diameter cables - larger clips are under development			
3 CORE SWA BROWN, BLACK & GREY			
1.5mm ²	12.17mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm ²	13.55mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm ²	14.68mm	12-14mm SuperClip (single cable only)	1LS(X)1214
6mm ²	15.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
10mm ²	18.63mm	18-20mm SuperClip (single cable only)	1LC(X)1820
16mm ²	20.78mm	20-22mm SuperClip (single cable only)	1LC(X)2022
25mm ²	24.9mm	23-25mm SuperClip (single cable only)	1LS(X)2325

PVC Insulated Flex

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
4 CORE SWA: BROWN, BLACK, GREY & BLUE			
1.5mm ²	12.88mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm ²	14.43mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm ²	16.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
6mm ²	17.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
10mm ²	20.1mm	20-22mm SuperClip (single cable only)	1LC(X)2022
16mm ²	22.4mm	20-22mm SuperClip (single cable only)	1LC(X)2022
NB: for larger diameter cables - larger clips are under development			
5 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm ²	13.72mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm ²	15.46mm	15-18mm SuperClip (single cable only)	1LS(X)1518
4mm ²	17.38mm	15-18mm SuperClip (single cable only)	1LS(X)1518
6mm ²	19.05mm	18-20mm SuperClip (single cable only)	1LC(X)1820
10mm ²	22.06mm	20-22mm SuperClip (single cable only)	1LC(X)2022
16mm ²	24.14mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			

PVC Insulated Flex

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
7 CORE SWA: WHITE NUMBERED WITH BLACK PRINT			
1.5mm ²	14.65mm	15-18mm SuperClip (single cable only)	1LS(X)1518
2.5mm ²	16.53mm	15-18mm SuperClip (single cable only)	1LS(X)1518
4mm ²	18.96mm	18-20mm SuperClip (single cable only)	1LC(X)1820
6mm ²	21.6mm	20-22mm SuperClip (single cable only)	1LC(X)2022
10mm ²	25.3mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
12 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm ²	18.9mm	18-20mm SuperClip (Single cable only)	1LC(X)1820
2.5mm ²	21.76mm	20-22mm SuperClip (Single cable only)	1LC(X)2022
NB: for larger diameter cables - larger clips are under development			
19 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm ²	21.99mm	20-22mm SuperClip (single cable only)	1LC(X)2022
NB: for larger diameter cables - larger clips are under development			
27 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm ²	21.99mm	20-22mm SuperClip (single cable only)	1LC(X)2022
NB: for larger diameter cables - larger clips are under development			
37 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm ²	21.99mm	20-22mm SuperClip (single cable only)	1LC(X)2022
NB: for larger diameter cables - larger clips are under development			

SWA Armoured Power Cable Standard

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
2 CORE SWA : BROWN & BLUE			
1.5mm	11.06mm	9-11mm Single (x1 cable) OR 9-11mm Double (x2 cable)	1LC(X)911 OR 1LC(X)9112
2.5mm	12.4mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm	13.38mm	12-14mm SuperClip (single cable only)	1LS(X)1214
6mm	14.38mm	12-14mm SuperClip (single cable only)	1LS(X)1214
10mm	16.18mm	15-18mm SuperClip (single cable only)	1LS(X)1518
16mm	19.06mm	18-20mm SuperClip (single cable only)	1LC(X)1820
25mm	20mm	18-20mm SuperClip (single cable only)	1LC(X)1820
35mm	23.2mm	23-25mm SuperClip (single cable only)	1LS(X)2325
50mm	25.1mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
3 CORE SWA BROWN, BLACK & GREY			
1.5mm ²	12.17mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm ²	13.55mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm ²	14.68mm	15-18mm SuperClip (Single cable only)	1LS(X)1518
6mm ²	15.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
10mm ²	18.63mm	18-20mm SuperClip (single cable only)	1LC(X)1820
16mm ²	20.78mm	20-22mm SuperClip (single cable only)	1LC(X)2022
25mm ²	24.9mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			

SWA Armoured Power Cable Standard

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
4 CORE SWA: BROWN, BLACK, GREY & BLUE			
1.5mm ²	12.88mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm ²	14.43mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm ²	16.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
6mm ²	17.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
10mm ²	20.1mm	20-22mm SuperClip (single cable only)	1LC(X)2022
16mm ²	22.4mm	20-22mm SuperClip (single cable only)	1LC(X)2022
NB: for larger diameter cables - larger clips are under development			
5 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm ²	13.72mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm ²	15.46mm	15-18mm SuperClip (single cable only)	1LS(X)1518
4mm ²	17.38mm	15-18mm SuperClip (single cable only)	1LS(X)1518
6mm ²	19.05mm	18-20mm SuperClip (single cable only)	1LC(X)1820
10mm ²	22.06mm	20-22mm SuperClip (single cable only)	1LC(X)2022
16mm ²	24.14mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			

SWA Armoured Power Cable Standard

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
7 CORE SWA: WHITE NUMBERED WITH BLACK PRINT			
1.5mm ²	14.65mm	15-18mm SuperClip (single cable only)	1LS(X)1518
2.5mm ²	16.53mm	15-18mm SuperClip (single cable only)	1LS(X)1518
4mm ²	18.96mm	18-20mm SuperClip (single cable only)	1LC(X)1820
6mm ²	21.6mm	20-22mm SuperClip (single cable only)	1LC(X)2022
10mm ²	25.3mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
12 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm ²	18.9mm	18-20mm SuperClip (single cable only)	1LC(X)1820
2.5mm ²	21.76mm	20-22mm SuperClip (single cable only)	1LC(X)2022
NB: for larger diameter cables - larger clips are under development			
19 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm ²	21.99mm	20-22mm SuperClip (single cable only)	1LC(X)2022
NB: for larger diameter cables - larger clips are under development			
27 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm ²	21.99mm	20-22mm SuperClip (single cable only)	1LC(X)2022
NB: for larger diameter cables - larger clips are under development			
37 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm ²	21.99mm	20-22mm SuperClip (single cable only)	1LC(X)2022
NB: for larger diameter cables - larger clips are under development			

SWA Armoured Power Cable LS(H)F

Cable Size		Recommended Clip Size	Part number
Nominal Cable Cross Sectional Area	Cable Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
2 CORE SWA : BROWN & BLUE			
1.5mm ²	12.3mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm ²	12.9mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm ²	13.9mm	12-14mm SuperClip (single cable only)	1LS(X)1214
6mm ²	15mm	15-18mm SuperClip (single cable only)	1LS(X)1518
10mm ²	17.05mm	15-18mm SuperClip (single cable only)	1LS(X)1518
16mm ²	19.5mm	18-20mm SuperClip (single cable only)	1LC(X)1820
25mm ²	22.1mm	23-25mm SuperClip (single cable only)	1LS(X)2325
35mm ²	24.95mm	23-25mm SuperClip (single cable only)	1LS(X)2325
50mm ²	25.4mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
3 CORE SWA BROWN, BLACK & GREY			
1.5mm ²	12.17mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm ²	13.55mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm ²	14.68mm	15-18mm SuperClip (Single cable only)	1LS(X)1518
6mm ²	15.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
10mm ²	18.63mm	18-20mm SuperClip (single cable only)	1LC(X)1820
16mm ²	20.78mm	20-22mm SuperClip (single cable only)	1LC(X)2022
25mm ²	24.9mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			

SWA Armoured Power Cable LS(H)F

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
4 CORE SWA: BROWN, BLACK, GREY & BLUE			
1.5mm ²	12.88mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm ²	14.43mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm ²	16.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
6mm ²	17.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
10mm ²	20.1mm	20-22mm SuperClip (single cable only)	1LC(X)2022
16mm ²	22.4mm	20-22mm SuperClip (single cable only)	1LC(X)2022
NB: for larger diameter cables - larger clips are under development			
5 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm ²	13.72mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm ²	15.46mm	15-18mm SuperClip (single cable only)	1LS(X)1518
4mm ²	17.38mm	15-18mm SuperClip (single cable only)	1LS(X)1518
6mm ²	19.05mm	18-20mm SuperClip (single cable only)	1LC(X)1820
10mm ²	22.06mm	20-22mm SuperClip (single cable only)	1LC(X)2022
16mm ²	24.14mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			

SWA Armoured Power Cable LS(H)F

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Actual Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
7 CORE SWA: WHITE NUMBERED WITH BLACK PRINT			
1.5mm ²	14.65mm	15-18mm SuperClip (single cable only)	1LS(X)1518
2.5mm ²	16.53mm	15-18mm SuperClip (single cable only)	1LS(X)1518
4mm ²	18.96mm	18-20mm SuperClip (single cable only)	1LC(X)1820
6mm ²	21.6mm	20-22mm SuperClip (single cable only)	1LC(X)2022
10mm ²	25.3mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
12 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm ²	18.9mm	18-20mm SuperClip (single cable only)	1LC(X)1820
2.5mm ²	21.76mm	20-22mm SuperClip (single cable only)	1LC(X)2022
NB: for larger diameter cables - larger clips are under development			
19 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm ²	21.99mm	20-22mm SuperClip (Single cable only)	1LC(X)2022
NB: for larger diameter cables - larger clips are under development			
27 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm ²	21.99mm	20-22mm SuperClip (single cable only)	1LC(X)2022
NB: for larger diameter cables - larger clips are under development			
37 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm ²	21.99mm	20-22mm SuperClip (single cable only)	1LC(X)2022
NB: for larger diameter cables - larger clips are under development			

Conduit

Conduit Size	Recommended Clip Size	Part Number
Actual Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	
GALVANISED		
16mm	15-18mm SuperClip (Galvanised)	1LSGALV1518
20mm	18-20mm SuperClip (Galvanised)	1LSGALV1820
25mm	23-25mm SuperClip (Galvanised)	1LSGALV2325
BLACK ENAMEL		
16mm	15-18mm SuperClip (Black)	1LSB1518
20mm	18-20mm SuperClip (Black)	1LSB1820
25mm	23-25mm SuperClip (Black)	1LSB2325
WHITE PVC		
16mm	15-18mm SuperClip (White)	1LSW1518
20mm	18-20mm SuperClip (White)	1LSW1820
25mm	23-25mm SuperClip (White)	1LSW2325
BLACK PVC		
16mm	15-18mm SuperClip (Black)	1LSB1518
20mm	18-20mm SuperClip (Black)	1LSB1820
25mm	23-25mm SuperClip (Black)	1LSB2325

Conduit

Conduit Size	Recommended Clip Size	Part Number
Actual Overall Diameter	DISCLAIMER: sizing may vary slightly according to manufacturer	
BLACK FLEXIBLE		
10mm	9-11mm Fireclip (Black)	1LCB911
16mm	15-18mm SuperClip (Black)	1LSB1518
20mm	18-20mm SuperClip (Black)	1LSB1820
25mm	23-25mm SuperClip (Black)	1LSB2325
WHITE FLEXIBLE		
10mm	9-11mm Fireclip (White)	1LCW911
16mm	15-18mm SuperClip (White)	1LSW1518
20mm	18-20mm SuperClip (White)	1LSW1820
25mm	23-25mm SuperClip (White)	1LSW2325
BLACK FLEXIBLE		
10mm	9-11mm Fireclip (Grey)	1LCG911
16mm	15-18mm SuperClip (Grey)	1LSG1518
20mm	18-20mm SuperClip (Grey)	1LSG1820
25mm	23-25mm SuperClip (Grey)	1LSG2325
BLACK FLEXIBLE		
10mm	9-11mm Fireclip (Galvanised)	1LCGALV911
16mm	15-18mm SuperClip (Galvanised)	1LSGALV1518
20mm	18-20mm SuperClip (Galvanised)	1LSGALV1820
25mm	23-25mm SuperClip (Galvanised)	1LSGALV2325

SPECIALIST COLOURS AVAILABLE

MOQs and lead times may apply.
Available from Wholesalers only.

RAL 1000	RAL 1001	RAL 1002	RAL 1003	RAL 1004	RAL 1005	RAL 1006	RAL 1007	RAL 1011	RAL 1012
RAL 1013	RAL 1014	RAL 1015	RAL 1016	RAL 1017	RAL 1018	RAL 1019	RAL 1020	RAL 1021	RAL 1023
RAL 1024	RAL 1026	RAL 1027	RAL 1028	RAL 1032	RAL 1033	RAL 1034	RAL 1035	RAL 1036	RAL 1037
RAL 2000	RAL 2001	RAL 2002	RAL 2003	RAL 2004	RAL 2005	RAL 2007	RAL 2008	RAL 2009	RAL 2010
RAL 2011	RAL 2012	RAL 2013	RAL 3000	RAL 3001	RAL 3002	RAL 3003	RAL 3004	RAL 3005	RAL 3007
RAL 3009	RAL 3011	RAL 3012	RAL 3013	RAL 3014	RAL 3015	RAL 3016	RAL 3017	RAL 3018	RAL 3020
RAL 3022	RAL 3024	RAL 3026	RAL 3027	RAL 3028	RAL 3031	RAL 3032	RAL 3033	RAL 4001	RAL 4002
RAL 4003	RAL 4004	RAL 4005	RAL 4006	RAL 4007	RAL 4008	RAL 4009	RAL 4010	RAL 4011	RAL 4012
RAL 5000	RAL 5001	RAL 5002	RAL 5003	RAL 5004	RAL 5005	RAL 5007	RAL 5008	RAL 5009	RAL 5010
RAL 5011	RAL 5012	RAL 5013	RAL 5014	RAL 5015	RAL 5017	RAL 5018	RAL 5019	RAL 5020	RAL 5021
RAL 5022	RAL 5023	RAL 5024	RAL 5025	RAL 5026	RAL 6000	RAL 6001	RAL 6002	RAL 6003	RAL 6004
RAL 6005	RAL 6006	RAL 6007	RAL 6008	RAL 6009	RAL 6010	RAL 6011	RAL 6012	RAL 6013	RAL 6014
RAL 6015	RAL 6016	RAL 6017	RAL 6018	RAL 6019	RAL 6020	RAL 6021	RAL 6022	RAL 6024	RAL 6025
RAL 6026	RAL 6027	RAL 6028	RAL 6029	RAL 6032	RAL 6033	RAL 6034	RAL 6035	RAL 6036	RAL 6037
RAL 6038	RAL 7000	RAL 7001	RAL 7002	RAL 7003	RAL 7004	RAL 7005	RAL 7006	RAL 7008	RAL 7009
RAL 7010	RAL 7011	RAL 7012	RAL 7013	RAL 7015	RAL 7016	RAL 7021	RAL 7022	RAL 7023	RAL 7024
RAL 7026	RAL 7030	RAL 7031	RAL 7032	RAL 7033	RAL 7034	RAL 7035	RAL 7036	RAL 7037	RAL 7038
RAL 7039	RAL 7040	RAL 7042	RAL 7043	RAL 7044	RAL 7045	RAL 7046	RAL 7047	RAL 7048	RAL 8000
RAL 8001	RAL 8002	RAL 8003	RAL 8004	RAL 8007	RAL 8008	RAL 8011	RAL 8012	RAL 8014	RAL 8015
RAL 8016	RAL 8017	RAL 8019	RAL 8022	RAL 8023	RAL 8024	RAL 8025	RAL 8028	RAL 8029	RAL 9001
RAL 9002	RAL 9003	RAL 9004	RAL 9005	RAL 9006	RAL 9007	RAL 9010	RAL 9011	RAL9016	RAL 9017
RAL 9018	RAL 9022	RAL 9023							

Standard colours include Red, Black, White, Grey, and Galvanised.

SMALL PARTS COATING

We coat small parts!

Small Parts Coating (LINIAN SPC) is a direct subcontract of LINIAN, our family-run manufacturing company, renowned for Faster, Safer, Simpler products.

At LINIAN, we weren't content to settle for dull colours, chipped paint, or toxic smoke emissions. We needed a better solution, so, we developed and invested in our own state-of-the-art coating plant. Our coating is corrosion resistant, chip resistant, UV stable, and suitable for both indoor and outdoor use. Our state-of-the-art coating plant can coat large quantities of small parts to any RAL colour. That's over 1,000 different colours!

We now use our premium coating for all LINIAN clips, and LINIAN customers are continually impressed with the durable and professional finish. But we don't just want to keep this special coating to ourselves. Our coating can be applied to mass produced small parts such as rivets, screws, and buttons, and works with a whole variety of materials including metal, glass, wood, and plastic. That's why we're launching Small Parts Coating.

At Small Parts Coating, we are happy to discuss any mass-coating project, big or small. We work with manufacturers across any industry including automotive, electrical, textiles and design.

Contact us today to discuss your coating requirements:
info@smallpartscoating.co.uk
 Tel: 0141 212 5886

LINIAN
SPC

LINIAN LABS

Product Development Services

At LINIAN, we derive innovation from our own market experience and the needs of installers, designers and educators. Our research and development team are continually working on new ideas.

**Can't find the product you need?
 Can't solve the problem with any off the shelf LINIAN solutions?**

We are product developers and innovators at our very core. If you have an idea for a faster, safer, simpler product, get in touch today to discuss our product development service. We can support you to get your very own product on the market.

For Fibre Cables
and Induction Loop
Hearing Cabling

NEW NANOCLIP™

Incredibly strong,
Invisibly small



The new **LINIAN NanoClip** is a patent-pending 18th Edition Compliant method of fixing 2mm and 3mm fibre optic cables plus all other small diameter cable applications.

Features:

- Available in white, black and brown
- 2mm and 3mm Fibre Optic cables and other small diameter cables.
- Measurements: 2mm/2.8mm by 15.4mm, 3mm/3.8mm by 15.4mm.

JOIN THE LINIAN COMMUNITY

Have you joined the LINIAN #InstallationRevolution?

If so, we love to hear from you. You can contact us directly, leave a review on Google, or join in the conversation on social media:

- Twitter @LINIANFireClip
- Facebook @LINIANFireClip
- Instagram @LINIANClip
- LinkedIn/linianfireclip

Sign up to our mailing list to stay up to date with all the latest news and offers at www.linianclip.co.uk

TESTIMONIALS

"The clips are great and easier and quicker to install than the standard p-clip, screw, and rawplug. I would now use the LINIAN Clip on future installations."

Project Engineer, Balfour Beatty Kilpatrick.

"Great product, made in the UK by a great company."

Giffords Electrical @giffordselectrical, Instagram

"Super quick friendly and efficient service."

RW Electrical Services @services_rw, Twitter

"Not only are they easy to use but they save us so much time and labour when cabling."

Abel Alarms, Glasgow. National Fire and Security installer, in business for over 50 years.

SPARKYSHARE





Go online for more information
LINIANCLIP.CO.UK

Speak to our sales team today on
0141 465 4858