


Datasheet

# Landlite Corrosion Proof Range

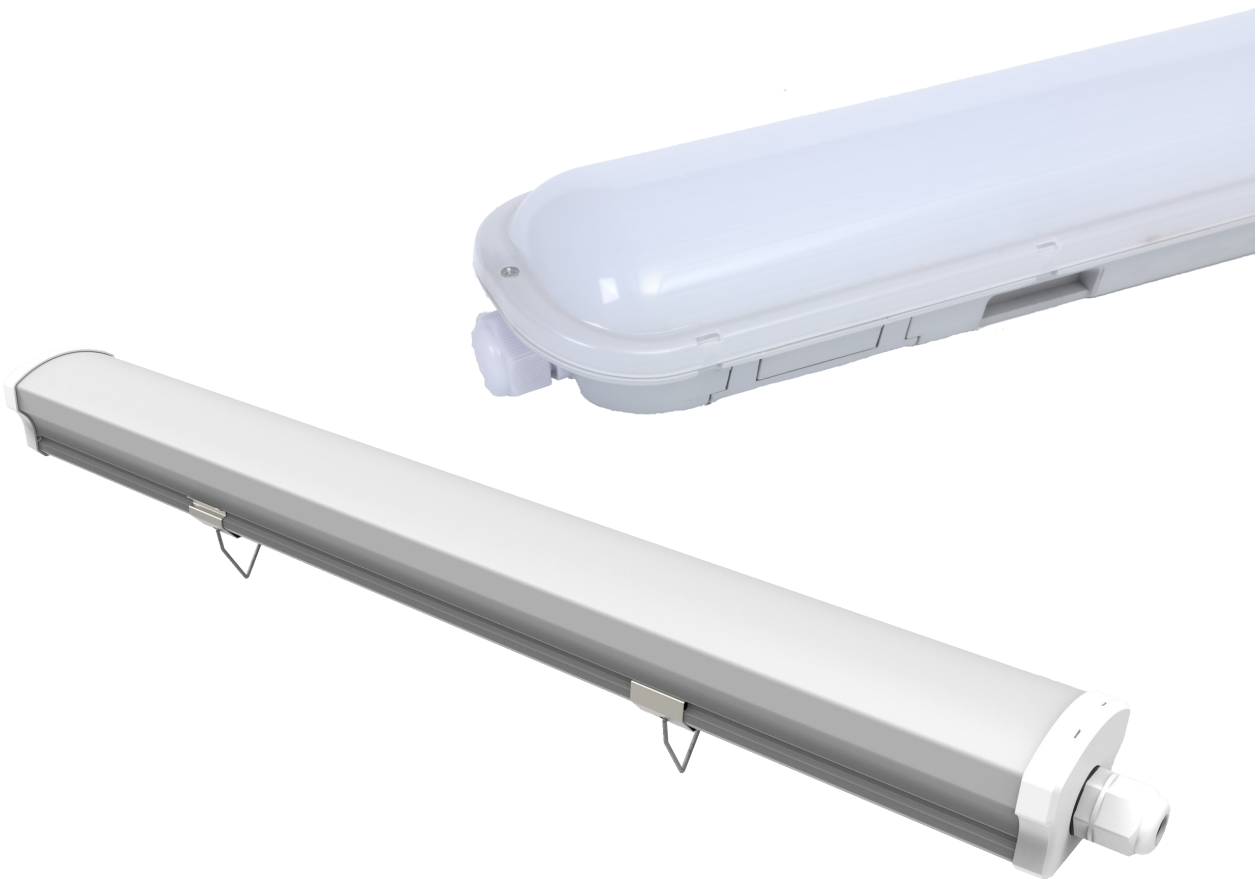

Exclusively from CESCO the Landlite Corrosion Proof range offers a wide range of corrosion proofs to suit any needs. From the traditional body fitting, to the slim sleek ACFB range which is ideal for any needs be it the normal corrosion proof requirements or a requirement for something more aesthetically pleasing. The corrosion proofs come in different lengths and bodies and with wired through options for easy wiring


### LED Corrosion Proof Fittings

Sleek Clipless Body

Various options available

Easy wire with clip at back

Press connectors



Efficiency - up to 105 Lumen per Watt

Code	ACFLED50	ACFLED50WT	ACFLED60	ACFLED60WT	ACFLED56/EM
Watt	50W	50W	60W	60W	56W
Lumen Output	5250	5250	6000	6000	6400
CCT	4000K	4000K	4000K	4000K	4000K
Wired Through	No	Yes	No	Yes	No
Loop In/Loop Out	N/A	10	N/A	10	N/A
Triple E Code	LIG85555	TBC	LIG93023	TBC	TBC
Emergency	No	No	No	No	Yes

- 170 - 260 Volt
- 50/60 Hz
- -20° to +45°
- 30,000 hours
- 3 Year warranty
- Polycarbonate base & diffuser
- Size—60 X 92 X 1500mm
- Clipless Fitting



## LED Slim Line Corrosion Proof Battens

Slim profile body


Aesthetically more attractive than  
standard corrosion proofs

Twist lock gland

Press connections

Clipless Construction

Suitable for Suspension or Surface Mounting



Efficiency - up to 100  
Lumen per Watt

Code	ACFB18	ACFB36	ACFB50
Watt	18W	36W	50W
Lumen Output	1800 Lumen	3600 Lumen	5000 Lumen
Size	56 X 68 X 627mm	56 X 58 X 1212mm	56 X 49 X 1530mm

