


Plymouth Compact Splicing Connectors

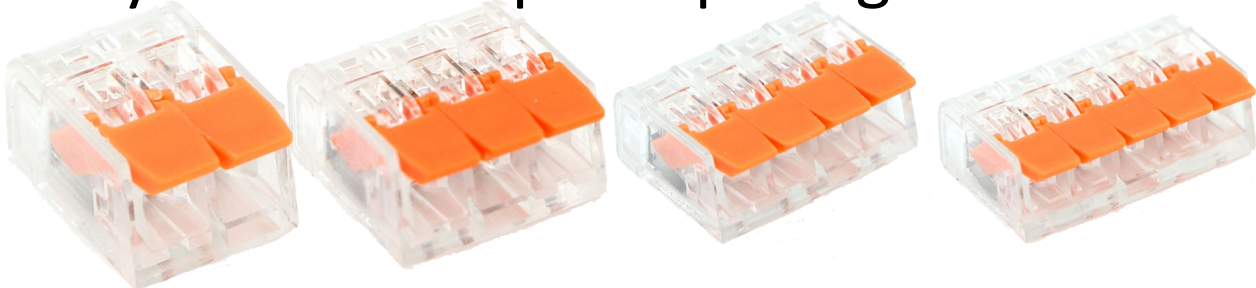

Reference	CSC2
Colour	Transparent/Orange
Size	L19.1 x H9.9 x W13.1mm
Connection Type	Cage Clamp
Material	Flame resistant Nylon PA66, PC Housing
Rating	400V/32A
Cable Size	0.2 - 4mm ² - 12AWG
Temperature	-40° - +105°C
Number of Poles	2
Sharpnel	Stainless Steel
Standard	IEC 60947-7-1
Packing	25 per bag - 4 bags per box

Reference	CSC3
Colour	Transparent/Orange
Size	L19.1 x H9.9 x W13.1mm
Connection Type	Cage Clamp
Material	Flame resistant Nylon PA66, PC Housing
Rating	400V/32A
Cable Size	0.2 - 4mm ² - 12AWG
Temperature	-40° - +105°C
Number of Poles	3
Sharpnel	Stainless Steel
Standard	IEC 60947-7-1
Packing	25 per bag - 4 bags per box

Reference	CSC4
Colour	Transparent/Orange
Size	L19.1 x H9.9 x W13.1mm
Connection Type	Cage Clamp
Material	Flame resistant Nylon PA66, PC Housing
Rating	400V/32A
Cable Size	0.2 - 4mm ² - 12AWG
Temperature	-40° - +105°C
Number of Poles	4
Sharpnel	Stainless Steel
Standard	IEC 60947-7-1
Packing	25 per bag - 4 bags per box

Reference	CSC5
Colour	Transparent/Orange
Size	L19.1 x H9.9 x W13.1mm
Connection Type	Cage Clamp
Material	Flame resistant Nylon PA66, PC Housing
Rating	400V/32A
Cable Size	0.2 - 4mm ² - 12AWG
Temperature	-40° - +105°C
Number of Poles	5
Sharpnel	Stainless Steel
Standard	IEC 60947-7-1
Packing	25 per bag - 4 bags per box