

LLX




230 V
50 Hz



IP
20

DP
CAT II

EEC
AB



Application:

These light fittings can be used as surface mounted or pendant.

Body:

White painted (RAL 9003) metal sheet

Accessories:


Tube suspension
Cord suspension ZH22
Protection grid OM

LLX21500ALDP

1500mm Surface C2 Modular

Supplied with no gear wired for LED tubes

Wired Live & Neutral 1 end—Other end blank

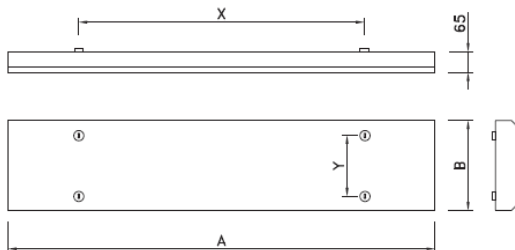

Dimensions				
Reference	A	B	X	Y
LLX21500ASDP	1560	266	1250	180

Note:

Surface mounted style of installation is recommended. When light fittings are suspended, they should be hung by 4 cords or tubes.