

INTERVENT

NVF Range 120mm (5")


Technical Details

Cat. No. Product type

NVF120S	Standard model for remote switching
NVF120P	As above supplied with pullcord switch
NVF120T	Timer model incorporating integral adjustable electronic timer (1 - 20 mins)
NVF120H	Humidity control which is adjustable between 40% and 95% RH
NVF120HP	As above but with pullcord override switch. Requires no switched live



Performance Graph

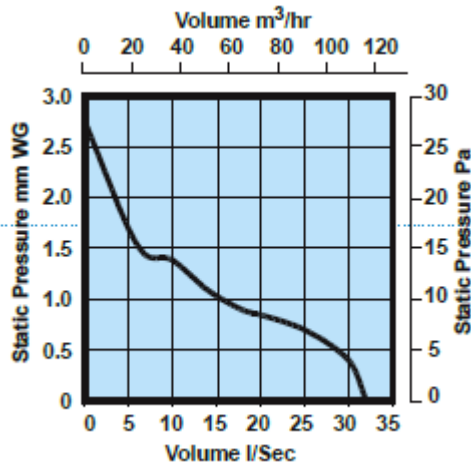

NVF120 Range

Electrical

220-240V AC. 50Hz. Single phase
 Consuming 16 watts. These fans are double insulated and do not require an earth. All wiring must comply with current IEE regulations. A double pole isolating switch, having a contact separating of at least 3mm in all poles, must be used with a 3 amp fuse fitted. The fan must not be accessible to a person using either the shower or bath and mounted a minimum of 1.8 meters from the floor

Additional Data

100mm (5") Range
 Maximum pressure: 27 p.a.
 Fan speed: 2400 r.p.m.
 Sound volume: 41dB(A)
 Max operating temperature: 40°C