

## **Datasheet**

# **Iona Switches & Sockets**



The Iona range of switches and Sockets are a stylish range with a curved edge to give a more aesthetically pleasing finish. They are ideal for all jobs be it a block of apartments or a stand alone house.







### **Switch Plates**

| Description                     | Code      | Height | Width |
|---------------------------------|-----------|--------|-------|
| 1 gang 1 way wall switch        | SLSW1.1   | 86     | 86    |
| 1 gang 2 way wall switch        | SLSW1.2   | 86     | 86    |
| 2 gang 2 way wall switch        | SLSW2.2   | 86     | 86    |
| 3 gang 2 way wall switch        | SLSW3.2   | 86     | 86    |
| 4 gang 2 way wall switch        | SLSW4.2   | 86     | 146   |
| 6 gang 2 way wall switch        | SLSW6.2   | 86     | 146   |
| 1 gang intermediate wall switch | SLSW/INT  | 86     | 86    |
| Intermediate switch module only | SLINT-MOD | 59     | 16    |
| 3 pole fan isolator switch      | SLF/IS    | 86     | 86    |

#### **Features**

- Slim Curved Edge Plate
- 10AX Rated
- 1 and 2 Way Switches
- Interchangeable Switch Modules
- Supplied with 2 X 30mm M3.5 Screws

| Height            | 86mm                             |
|-------------------|----------------------------------|
| Width             | 86 or 146mm                      |
| Current Rating    | 10A                              |
| Fixing Centres    | 60.3 or 120.6mm                  |
| Warranty          | 25 Years                         |
| Colour            | White                            |
| Options           | 1, 2, 3, 4 or 6 Gang             |
| Mounting          | Wall                             |
| Packing           | Individually packed with Barcode |
| Electrical        | 50/60Hz—230V                     |
| Plate Material    | Urea moulded heat resistant      |
| Terminals         | Copper with Zinc Plating         |
| Terminal Capacity | 4X1.5mm                          |









### Sockets

| Description                                | Code           | Height | Width |
|--|----------------|--------|-------|
| 1 gang Unswitched socket outlet            | SLS13          | 86     | 86    |
| 1 gang switched socket outlet              | SLS13/S        | 86     | 86    |
| 1 gang switched socket outlet c/w neon     | SLS13/SL       | 86     | 86    |
| 2 gang switched socket outlet—single pole  | SLS213/S       | 86     | 146   |
| 2 gang switched socket outlet—double pole  | SLS213/S/DP    | 86     | 146   |
| 2 gang switched socket outlet c/w neon     | SLS213/SL      | 86     | 146   |
| 2 gang switched socket c/w USB             | SLS213/S/USB   | 86     | 146   |
| 2 gang switched socket c/w A+C USB Outlets | SLS213/S/USB-C | 86     | 146   |

#### **Features**

- Slim Curved Edge Plate
- 13a Rated
- 1 and 2 Gang Options
- Supplied with 2 X 30mm M3.5 Screws
- Dupont Nylon Shutters—operated by earth bar
- Dual Earth Terminals (Twins Sockets only)
- USB Sockets—3.1A total charging load
  - 2x USB-A or 1 x UBS-A + 1x USB-C

| Height            | 86mm                             |
|-------------------|----------------------------------|
| Width             | 86 or 146mm                      |
| Current Rating    | 13A                              |
| Fixing Centres    | 60.3 or 120.6mm                  |
| Warranty          | 25 Years                         |
| Colour            | White                            |
| Options           | 1 or 2 Gang                      |
| Mounting          | Wall                             |
| Packing           | Individually packed with Barcode |
| Electrical        | 50/60Hz—230V                     |
| Plate Material    | Urea—Nylon rear housing          |
| Terminals         | Copper with Zinc Plating         |
| Terminal Capacity | 4X1.5mm                          |









### **Fused Connection Units**

| Description                      | Code      | Height | Width |
|----------------------------------|-----------|--------|-------|
| 13A fused spur                   | SLB4461   | 86     | 86    |
| 13A switched fused spur          | SLB4461S  | 86     | 86    |
| 13A fused spur c/w neon          | SLB4461L  | 86     | 86    |
| 13A switched fused spur c/w neon | SLB4461SL | 86     | 86    |

#### **Features**

- Slim Curved Edge Plate
- Double Pole Switch
- 13A Rated
- Fused with 13A Fuse
- Neon and Switch Option
- Flex Outlet and Clamp
- Supplied with 2 X 30mm M3.5 Screws









| Height            | 86mm                             |
|-------------------|----------------------------------|
| Width             | 86mm                             |
| Current Rating    | 13A                              |
| Fixing Centres    | 60.3mm                           |
| Warranty          | 25 Years                         |
| Colour            | White                            |
| Options           | Switch or Neon                   |
| Mounting          | Wall                             |
| Cable Entry       | Bottom Edge                      |
| Packing           | Individually packed with Barcode |
| Electrical        | 50/60Hz—230V                     |
| Plate Material    | Urea moulded heat resistant      |
| Terminals         | Copper with Zinc Plating         |
| Terminal Capacity | 4X1.5mm                          |







### **20A Double Pole Outlet Plates**

| Description   | Code      | Height | Width |
|---|-----------|--------|-------|
| 20A double pole switch                                  | SLS20     | 86     | 86    |
| 20A double pole switch c/w neon                         | SLS20L    | 86     | 86    |
| 20A double pole switch c/w neon—engraved 'Water Heater' | SLS20L/WH | 86     | 86    |
| 20A connection plate                                    | SLCP20    | 86     | 86    |

#### **Features**

- Slim Curved Edge Plate
- Double Pole Switch
- 20A Rated
- Neon Option
- Flex Outlet and Clamp
- Supplied with 2 X 30mm M3.5 Screws
- Connection Plate option—no Switch and no Neon

| Height            | 86mm                             |
|-------------------|----------------------------------|
| Width             | 86mm                             |
| Current Rating    | 13A                              |
| Fixing Centres    | 60.3mm                           |
| Warranty          | 25 Years                         |
| Colour            | White                            |
| Options           | Switch or Neon                   |
| Mounting          | Wall                             |
| Cable Entry       | Bottom Edge                      |
| Packing           | Individually packed with Barcode |
| Electrical        | 50/60Hz—230V                     |
| Plate Material    | Urea moulded heat resistant      |
| Terminals         | Copper with Zinc Plating         |
| Terminal Capacity | 4X1.5mm                          |













### S45 & 50A Wall Switches

| Description               | Code    | Height | Width |
|---------------------------|---------|--------|-------|
| 45A short switch c/w neon | SL145SN | 86     | 86    |
| 50A short switch c/w neon | SL150SN | 86     | 86    |
| 45A outlet plate          | SLCO45  | 86     | 86    |
| 45A tall switch c/w neon  | SL245SN | 86     | 146   |

#### **Features**

- Slim Curved Edge Plate
- Double Pole Switch
- With or Without Neon
- 45A or 50A Rated
- Dual Earth Terminals
- Red Rockers where applicable
- Supplied with 2 X 30mm M3.5 Screws
- Connection Plate option—no Switch and no Neon



| Height            | 86mm                             |
|-------------------|----------------------------------|
| Width             | 86mm or 146mm                    |
| Current Rating    | 13A                              |
| Fixing Centres    | 60.3 or 120.6mm                  |
| Warranty          | 25 Years                         |
| Colour            | White                            |
| Neon              | Yes—where applicable             |
| Markings          | ON & OFF                         |
| Mounting          | Wall                             |
| Mounting depth    | 47mm                             |
| Packing           | Individually packed with Barcode |
| Electrical        | 50/60Hz—230V                     |
| Plate Material    | Urea moulded heat resistant      |
| Terminals         | Copper with Zinc Plating         |
| Terminal Capacity | 1X16mm                           |









### TV/Coaxial Outlet Plates

| Description               | Code  | Height | Width |
|---------------------------|-------|--------|-------|
| 1 outlet TV coaxial point | 1TV   | 86     | 86    |
| 2 outlet TV coaxial point | 1TV/2 | 86     | 86    |

#### **Features**

- Slim Curved Edge Plate
- IEC Male Output
- Isolated
- Supplied with 2 X 30mm M3.5 Screws



| Height         | 86mm                             |
|----------------|----------------------------------|
| Width          | 86mm                             |
| Fixing Centres | 60.3mm                           |
| Warranty       | 25 Years                         |
| Colour         | White                            |
| Mounting       | Wall                             |
| Packing        | Individually packed with Barcode |
| Electrical     | 50/60Hz—230V                     |
| Plate Material | Urea moulded heat resistant      |









### RJ11 & BT Telephone Sockets

| Description                          | Code    | Height | Width |
|--------------------------------------|---------|--------|-------|
| 1 gang RJ11 telephone socket         | SLTFS/1 | 86     | 86    |
| 1 gang BT telephone socket—master    | SLTPM/1 | 86     | 86    |
| 1 gang BT telephone socket—secondary | SLTPS/1 | 86     | 86    |

#### **Features**

- Slim Curved Edge Plate
- RJ11 & BT Options
- Master/Secondary BT Option
- Supplied with 2 X 30mm M3.5 Screws

| 86mm                             |
|----------------------------------|
| 86mm                             |
| No                               |
| 60.3mm                           |
| No                               |
| Screw Type                       |
| 25 Years                         |
| White                            |
| Wall                             |
| Individually packed with Barcode |
| 50/60Hz—230V                     |
| Urea moulded heat resistant      |
|                                  |









### **Blank Plates**

| Description        | Code  | Height | Width |
|--------------------|-------|--------|-------|
| 1 gang blank plate | SL1BP | 86     | 86    |
| 2 gang blank plate | SL2BP | 86     | 146   |

#### **Features**

- Slim Curved Edge Plate
- Supplied with 2 X 30mm M3.5 Screws

| Height         | 86mm                             |
|----------------|----------------------------------|
| Width          | 86mm or 146mm                    |
| Fixing Centres | 60.3 or 120.6mm                  |
| Warranty       | 25 Years                         |
| Colour         | White                            |
| Mounting       | Wall                             |
| Packing        | Individually packed with Barcode |
| Plate Material | Urea moulded heat resistant      |









### **Module Media Plates**

| Description           | Code  | Height | Width |
|-----------------------|-------|--------|-------|
| 1 gang 1 module plate | SLEP1 | 86     | 86    |
| 1 gang 2 module plate | SLEP2 | 86     | 86    |
| 2 gang 4 module plate | SL3P4 | 86     | 146   |

#### **Features**

- Slim Curved Edge Plate
- Supplied with 2 X 30mm M3.5 Screws

| Height         | 86mm                             |
|----------------|----------------------------------|
| Width          | 86mm or 146mm                    |
| Fixing Centres | 60.3 or 120.6mm                  |
| Gangs          | 1 or 2                           |
| Modules        | 1, 2 or 4                        |
| Warranty       | 25 Years                         |
| Colour         | White                            |
| Mounting       | Wall                             |
| Packing        | Individually packed with Barcode |
| Plate Material | Urea moulded heat resistant      |









### **Dimmer Switches**

| Description              | Code   | Height | Width |
|--------------------------|--------|--------|-------|
| 1 gang 2 way 400W dimmer | SLHD12 | 86     | 86    |
| 2 gang 2 way 400W dimmer | SLHD22 | 86     | 86    |
| 3 gang 2 way 400W dimmer | SLHD32 | 86     | 146   |
| 4 gang 2 way 400W dimmer | SLHD42 | 86     | 146   |

#### **Features**

- Slim Curved Edge Plate
- Leading Edge Dimmers
- Suitable for 40—400W Loads
- Push on/off
- Interchangeable modules
- Supplied with 2 X 30mm M3.5 Screws

| Height                      | 86mm   |
|-----------------------------|--|
| Width                       | 86 or 146mm  |
| Rating                      | 40—400W  |
| Fixing Centres              | 60.3 or 120.6mm                                    |
| Warranty                    | 25 Years   |
| Suitable for LV             | Yes—de-rate by 50%                                 |
| Suitable for LED            | Yes—9—150W (can be uneven)                         |
| Colour                      | White  |
|                             | I .  |
| Options                     | 1, 2, 3 or 4 Gang                                  |
| Options  Mounting           | 1, 2, 3 or 4 Gang<br>Wall                          |
|                             | _  |
| Mounting                    | Wall   |
| Mounting Packing            | Wall Individually packed with Barcode              |
| Mounting Packing Electrical | Wall Individually packed with Barcode 50/60Hz—230V |










### **Unfurnished Dimmer Plates**

| Description                         | Code      | Height | Width |
|-------------------------------------|-----------|--------|-------|
| 1 gang unfurnished dimmer c/w knobs | SLHD1GPLT | 86     | 86    |
| 2 gang unfurnished dimmer c/w knobs | SLHD2GPLT | 86     | 86    |
| 3 gang unfurnished dimmer c/w knobs | SLHD3GPLT | 86     | 146   |
| 4 gang unfurnished dimmer c/w knobs | SLHD4GPLT | 86     | 146   |

#### **Features**

- Slim Curved Edge Plate
- Supplied with Knobs
- Ideal for LED Modules
- Supplied with 2 X 30mm M3.5 Screws

| Height         | 86mm                             |
|----------------|----------------------------------|
| Width          | 86 or 146mm                      |
| Modules        | Supplied Separate                |
| Fixing Centres | 60.3 or 120.6mm                  |
| Warranty       | 25 Years                         |
| Colour         | White                            |
| Options        | 1, 2, 3 or 4 Gang                |
| Mounting       | Wall                             |
| Packing        | Individually packed with Barcode |
| Plate Material | Urea—Nylon rear housing          |
|                |                                  |

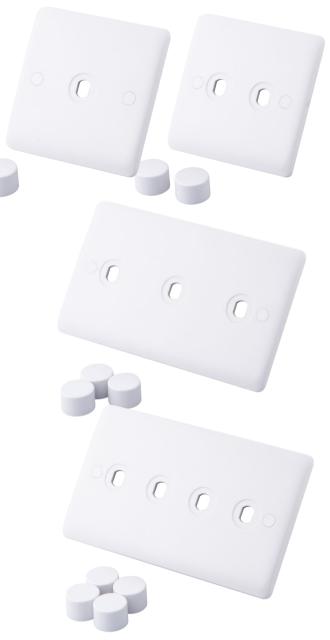







### **Dual Voltage Shaver Socket**

| Description                | Code  | Height | Width |
|----------------------------|-------|--------|-------|
| Dual voltage shaver socket | W-073 | 146    | 86    |

#### **Features**

- Slim Curved Edge Plate
- Dual Voltage—230V and 115V
- Rated 20VA
- Supplied with 2 X 30mm M3.5 Screws

| Height            | 146mm                            |
|-------------------|----------------------------------|
| Width             | 86mm                             |
| Current Rating    | 20VA                             |
| Fixing Centres    | 120.6mm                          |
| Warranty          | 25 Years                         |
| Colour            | White                            |
| Mounting          | Wall                             |
| Mounting Depth    | 47mm                             |
| Transformer       | Yes                              |
| Packing           | Individually packed with Barcode |
| Electrical        | 50/60Hz—230 or 115V              |
| Plate Material    | Urea—Nylon rear housing          |
| Terminals         | Copper with Zinc Plating         |
| Terminal Capacity | 2X1.5mm                          |
|                   |                                  |









### **5A Sockets**

| Description      | Code  | Height | Width |
|------------------|-------|--------|-------|
| 1 gang 5A socket | SLS15 | 86     | 86    |

#### **Features**

- Slim Curved Edge Plate
- 5A Rated
- Unswitched
- Supplied with 2 X 30mm M3.5 Screws

| Height            | 86mm                             |
|-------------------|----------------------------------|
| Width             | 86mm                             |
| Current Rating    | 5A                               |
| Fixing Centres    | 60.3                             |
| Warranty          | 25 Years                         |
| Colour            | White                            |
| Options           | 1 Gang                           |
| Switched          | No                               |
| Mounting          | Wall                             |
| Packing           | Individually packed with Barcode |
| Electrical        | 50/60Hz—230V                     |
| Plate Material    | Urea—Nylon rear housing          |
| Terminals         | Copper with Zinc Plating         |
| Terminal Capacity | 4X1.5mm                          |
|                   |                                  |









### **Data Outlet**

| Description             | Code     | Height | Width |
|-------------------------|----------|--------|-------|
| 1 gang RJ45 CAT6 outlet | SLRJ45/1 | 86     | 86    |

#### **Features**

- Slim Curved Edge Plate
- CAT 6 Socket
- Data Outlet
- Supplied with 2 X 30mm M3.5 Screws

| Height         | 86mm                             |
|----------------|----------------------------------|
| Width          | 86mm                             |
| Fixing Centres | 60.3                             |
| Warranty       | 25 Years                         |
| Colour         | White                            |
| Options        | 1 Gang                           |
| Mounting       | Wall                             |
| Packing        | Individually packed with Barcode |
| Electrical     | 50/60Hz—230V                     |
| Plate Material | Urea—Nylon rear housing          |
| Terminals      | Copper with Zinc Plating         |
|                |                                  |









### **Dual Immersion Switch**

| Description                           | Code    | Height | Width |
|---------------------------------------|---------|--------|-------|
| 20A double pole dual immersion switch | SLDIS/N | 86     | 86    |

#### **Features**

- Slim Curved Edge Plate
- 20A Rated
- Double Pole Switch
- Sink/Bath Switch
- Supplied with Neon
- Supplied with 2 X 30mm M3.5 Screws
- Supplied with Twin Earth Terminals

| Height            | 86mm                             |
|-------------------|----------------------------------|
| Width             | 86mm                             |
| Current Rating    | 5A                               |
| Fixing Centres    | 60.3                             |
| Warranty          | 25 Years                         |
| Colour            | White                            |
| Options           | 1 Gang                           |
| Markings          | On, Off, Sink, Bath              |
| Switched          | Yes                              |
| Neon              | Yes                              |
| Mounting          | Wall                             |
| Packing           | Individually packed with Barcode |
| Electrical        | 50/60Hz—230V                     |
| Plate Material    | Urea—Nylon rear housing          |
| Terminal Capacity | 3X2.5mm                          |
|                   |                                  |



