

Datasheet

Tezla Multi-Power UFO High Bay




The Tezla Multi-Power LED UFO High Bay fitting is a perfect solution for any warehouse, shed, garage, sports facility or even equestrian centres. With a power switch on the side of the fitting, each fitting can be set to any of 3 different powers, meaning even after install you can change the light output to increase/decrease it as desired and keep consumption to a minimum. An extra bonus is an IP rated socket on the front, which can be used to add a PIR sensor or a Microwave sensor to the fitting, allowing further functionality to each fitting. 1 fitting can in effect have 9 different options with the aid of the sensors. These fittings are IP65 rated with a 5 year warranty and high lumen output of up to 147lm/W. They come pre-wired for easy install and have an IP rating of IP65

Tezla LED UFO High Bay Fittings

- Power changeable using switch on side
- 80/100/150W option
- 100/150/200W option
- Rated 54,000 Hours
- 5 Year Warranty
- Socket on front to take PIR/Microwave sensor
- CE/CB/LVD/RoHS/SAA Certification
- 180—260V

HIUFO150


80/100/150W



Power Setting	80W	100W	150W
Lumen Output	11,200	13,800	20,850
Lumen per Watt	140	138	139

IP
IP65

Efficiency - Up to 140
Lumen per Watt

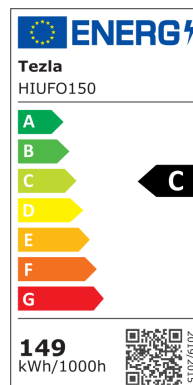

L80B50—54,000h

Dimensions:

Diameter: 284mm

Height: 184mm

HIUFO200


100/150/200W



Power Setting	100W	150W	200W
Lumen Output	14,700	21,260	27,700
Lumen per Watt	147	142	136

IP
IP65

Efficiency - Up to 147
Lumen per Watt

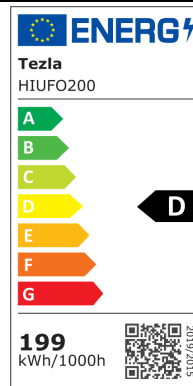

L80B50—54,000h

Dimensions:

Diameter: 334mm

Height: 184mm

HIUFO-MICRO

Microwave sensor for Tezla HIUFO

- Turn fittings on/off
- Dim fittings
- Set hold/on time
- Sense light levels
- Keep light to certain LUX levels
- Note—remote control required for programming



HIUFO-PIR

PIR sensor for Tezla HIUFO

- Turn fittings on/off



HIUFO-REM

Remote for use with
HIFUO-MICRO

