


WHITE SOFT EDGES & ROUND CORNERS RANGE

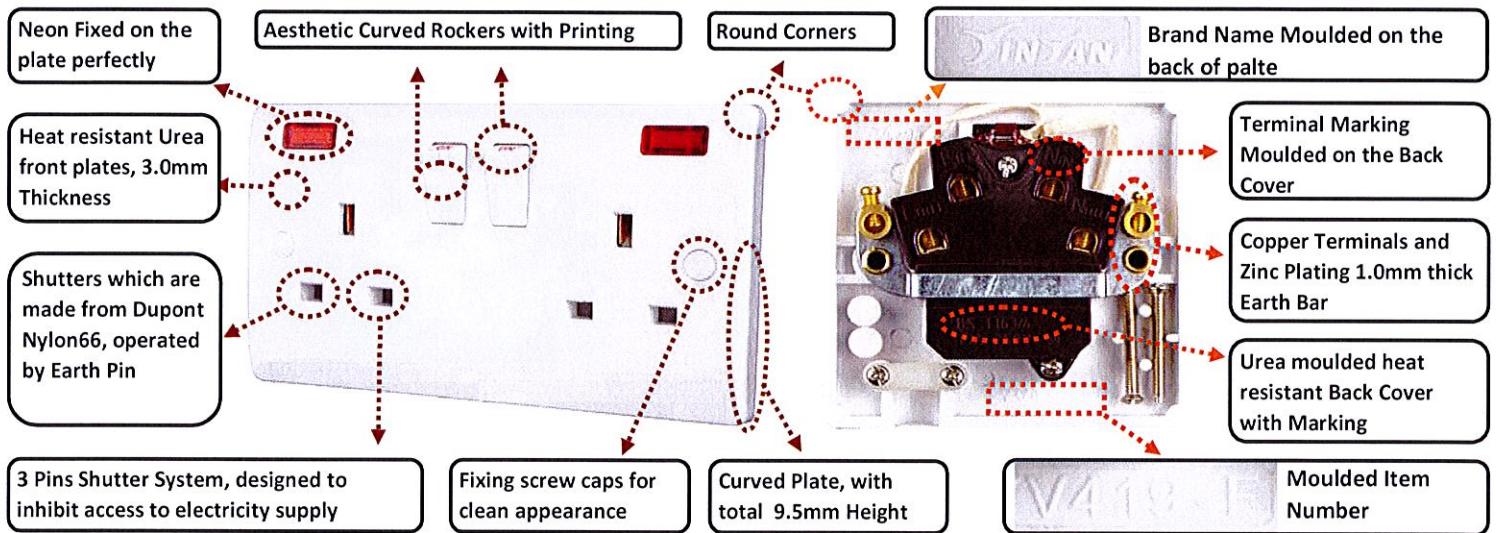

Range Introduction

This range is designed to comply with their relevant British Standards.

Ideal for contemporary home use.

Products are suitable for 25mm flush or 29mm surface mounting boxes, except for Dual Voltage Shaver Socket. Shaver socket suitable for 45mm flush or 47mm surface mounting boxes.

All products are packed, together with instruction leaf, in individual clear poly bags to ensure that products remain clean and undamaged right up until the point of installation;

10 Amp Wall Switches

ITEM NO. PRODUCT DESCRIPTIONS

V301	10 Amp 1 Gang 1 Way Switch
V302	10 Amp 1 Gang 2 Way Switch
V303	10 Amp 2 Gang 1 Way Switch
V304	10 Amp 2 Gang 2 Way Switch
V305	10 Amp 3 Gang 1 Way Switch
V306	10 Amp 3 Gang 2 Way Switch
V307	10 Amp 4 Gang 1 Way Switch
V308	10 Amp 4 Gang 2 Way Switch
V309	10 Amp 6 Gang 1 Way Switch
V310	10 Amp 6 Gang 2 Way Switch
V317	10 Amp 1 Gang Retractive Switch, Print BELL
V316	10 Amp 1 Gang Retractive Switch, Print PRESS
V319	10A 1G Retractive Switch Print BELL, With Neon
V318	10A 1G Retractive Switch Print PRESS, With Neon
V312	10 Amp 1 Gang Double Pole Switch
V313	10 Amp Intermediate Switch
V313-2	10 Amp 2 Gang Intermediate Switch
V322	10 Amp 1 Gang 2 Way Key Switch
V323	10 Amp 1 Gang Double Pole Key Switch
V336	10 Amp Triple Pole Switch
V337	10 Amp Triple Pole Fan Isolated Switch


Product Features:

** 10AX 250V a.c., Terminal capacity 3×1.5mm²;

** Face plates are incorporated with Brass Ferrules to install switch modules;

Range Features

- 1] Urea Scratch resistant and Heat Retardant faceplate;
- 2] Curved Plate with Curved Rockers for easy switch action;
- 3] Product Measurements:
One gang: 86mm×86mm×9.5mm
Two gang: 146mm×86mm×9.5mm
- 4] Supplied with accessories bag, includes two 30mm M3.5 fixing screws and 2 pieces of Secew Caps;
- 5] Perfect engineering design, allow all ribs on the back of front cover with slope angles where the ribs connect to front plate, reduce the possibility of sink marks on the front;

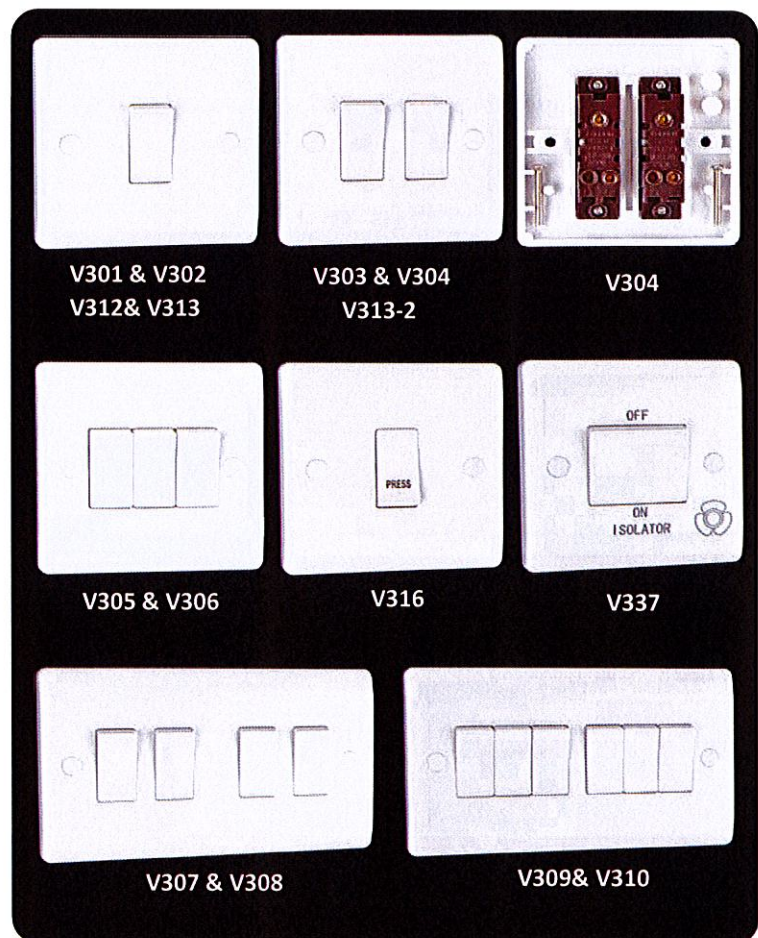


WHITE SOFT EDGES & ROUND CORNERS RANGE

ITEM NO. PRODUCT DESCRIPTIONS

V340	10 Amp 1 Gang 2 Way Architrave Switch
V340BE	10A 1G 2W Retractive Architrave Switch Print BELL
V340PR	10A 1G 2W Retractive Architrave Switch Print PRESS
V341	10 Amp 2 Gang 2 Way Architrave Switch

Product Features:

- ** Products are conformed to relevant BS standard, tested by Intertek Shanghai, Test Verification for module switches is 130800964SHA-V1, 131001461SHA-V1 for Triple Pole Switches;
- ** All 10A Wall Switches, except for Triple Pole products, are supplied with Interchangeable Modular Design, allowed on site flexible.

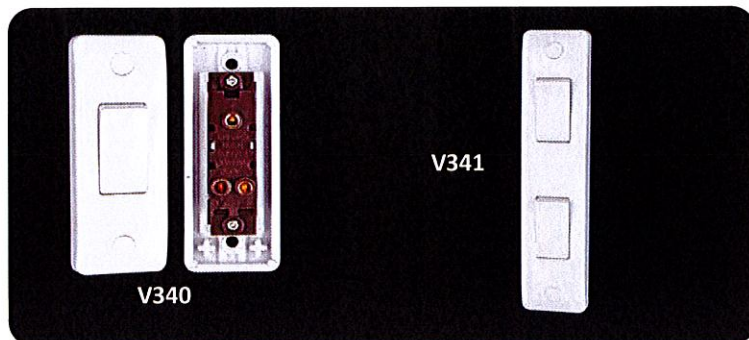


20 Amp DP Switches

ITEM NO. PRODUCT DESCRIPTIONS

V325	20 Amp Double Pole Switch
V325F	20 Amp Double Pole Switch with Flexible Outlet
V325/WH	20 Amp Double Pole Water Heater Switch
V325/AC	20 Amp Double Pole Air Condition Switch
V325F/WH	20A DP Water Heater Switch with Flexible Outlet
V325F/AC	20A DP Air Condition Switch with Flexible Outlet
V324	20 Amp Double Pole Switch With Neon
V324F	20 Amp DP Switch with Flexible Outlet W/Neon
V324/WH	20 Amp DP Water Heater Switch With Neon With Printing Under Rocker
V324/AC	20A DP Air Condition Switch With Neon, With Printing under Rocker
V324F/WH	20A DP Water Heater Switch with Flexible Outlet W/Neon, Printing under Rocker
V324F/AC	20A DP Air Condition Switch with Flexible Outlet W/Neon, Printing under Rocker
V326	20 Amp Dual Immersion Heater Switch
V820	20 Amp Connection Plate
V820F	20 Amp Connection Plate with Flexible Outlet

Product Features:

- ** 20A DP Switches are conformed to BS EN 60669, tested by Intertek Shanghai, Test Verification is 130701874SHA-V1;
- ** Flex. Outlet Version is suitable for 2.5mm² flexible cable;
- ** Cable Clamp supplied, expect for Dual Immersion Heater Switch.

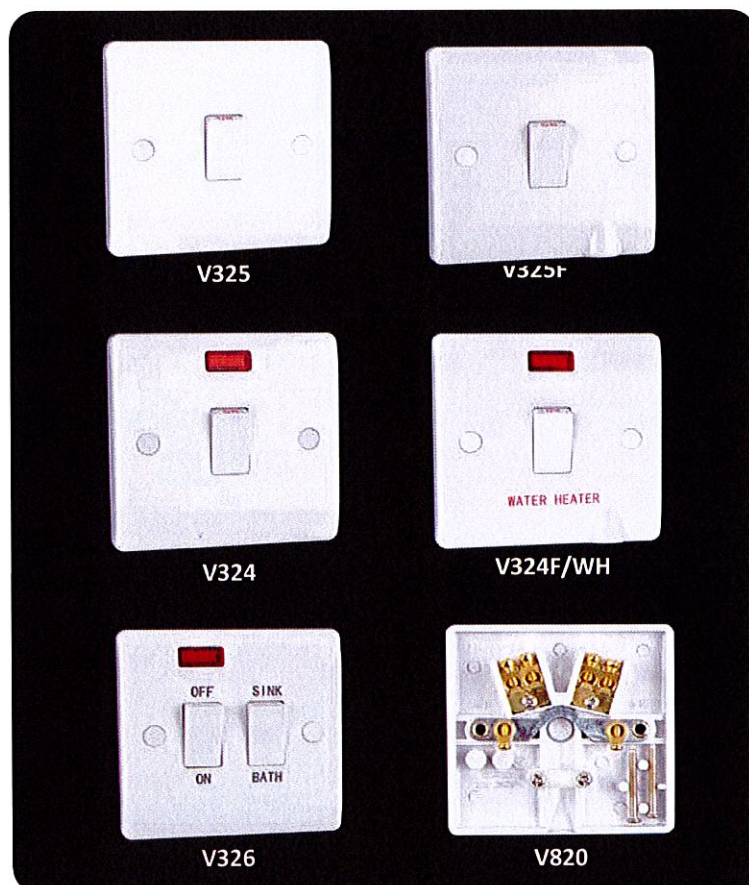


Blank Plates And Shaver Socket

ITEM NO. PRODUCT DESCRIPTIONS

V401	1 Gang Blank Plate
V402	2 Gang Blank Plate
V458	Dual Voltage Shaver Socket, W/ Neon Indicator

Product Features:

- ** Urea moulded blank plates, conforms to BS5733;
- ** Shaver socket conforms to BS 3535, Urea front plate, 20VA @ 230V and 115V.

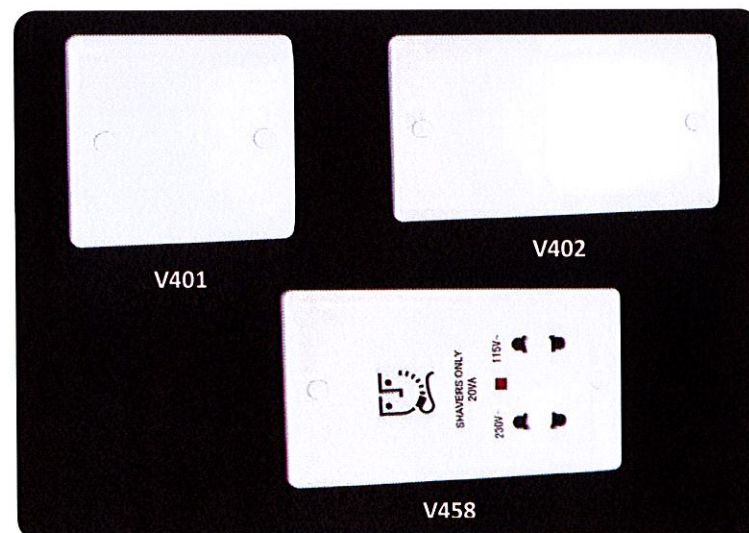

WHITE SOFT EDGES & ROUND CORNERS RANGE


45 Amp DP Switches, Cooker Panels and Connection Plate

ITEM NO. PRODUCT DESCRIPTIONS

V328	45 Amp Double Pole Switch
V327	45 Amp Double Pole Switch With Neon
V330	45 Amp Double Pole Switch Tall Plate
V329	45 Amp Double Pole Switch Tall Plate With Neon
V332	45 Amp Double Pole Switch+13A Switched Socket
V331	45 Amp DP Switch+13A Switched Socket W/Neon
V821	45 Amp Cooker Cable Outlet

Product Features:

- ** Products are conformed to relevant BS standard, tested by Intertek Shanghai, Test Verification for 45A DP switches is 130800965SHA-V1, and for the Cooker Panels is SH11030466-V1;
- ** 45A, 250 a.c. with double pole switch.

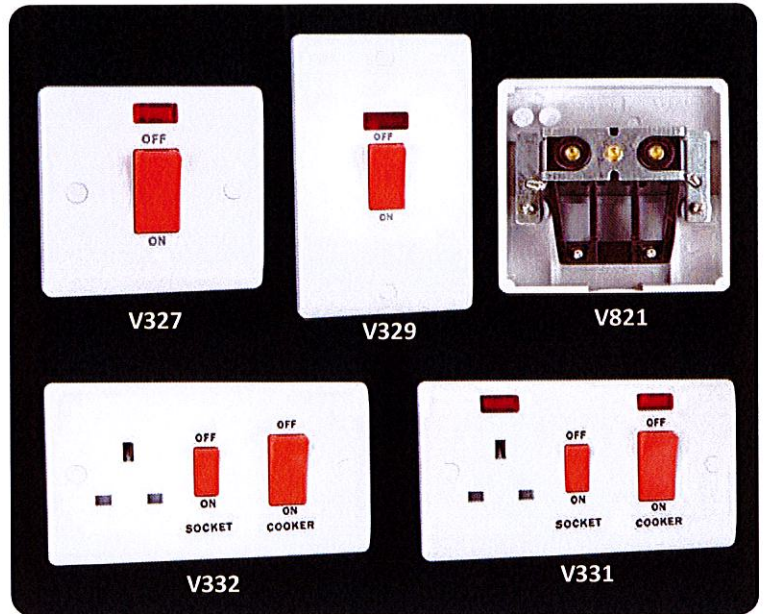


13 Amp Socket Outlets

ITEM NO. PRODUCT DESCRIPTIONS

V403	1 Gang 13 Amp Unswitched Socket
V405	1 Gang 13 Amp Switched Socket Single Pole
V409	1 Gang 13 Amp Switched Socket Double Pole
V407	1G 13A Switched Socket Single Pole W/Neon
V411	1G 13A Switched Socket Double Pole W/Neon
V404	2 Gang 13 Amp Unswitched Socket
V406	2 Gang 13 Amp Switched Socket Single Pole
V410	2 Gang Double Pole Switched 13 Amp Socket
V408	2G 13A Single Pole Switched Socket W/Neon
V412	2G 13A Double Pole Switched Socket W/Neon
V406-2U2A	2 Gang 13A Switched Socket With 2 USB Ports, DC 5V Total 2A Shared By 2 Ports

Product Features:

- ** 13A Sockets are conformed to BS 1363, tested by Intertek Shanghai, Test Verification is 130701780SHA-V1. 13A, 250V, with 4x2.5mm² Terminal Capacity, Dual Earth for 2G socket;
- ** All sockets have Earth Pin Operation System, designed to inhibit access to electricity supply unless Shutter operated by Earth Pin;
- ** Item V406/2U2A is conformed to BS 5733 and EN 60950, product is tested by Intertek Shanghai, Test Verification is 140300680SHA-V1;
- ** EMC directive, relevant standard EN 61000, Test Verification is 140300682SHA-V1;
- ** REACH directive;
- ** Product is including 2xUSB charger ports, DC 5V with total output 2.1A shared by 2 ports. Product is suitable for Ipads, iPhones, Smart Phones, Tablets, Cameras and more;
- ** Suitable for 25mm Deep switch box;
- ** Output Tolerance < 1%, Stand-by Power < 0.3W;
- ** Incorporated with overload protection, thunder protection and short circuit protection.

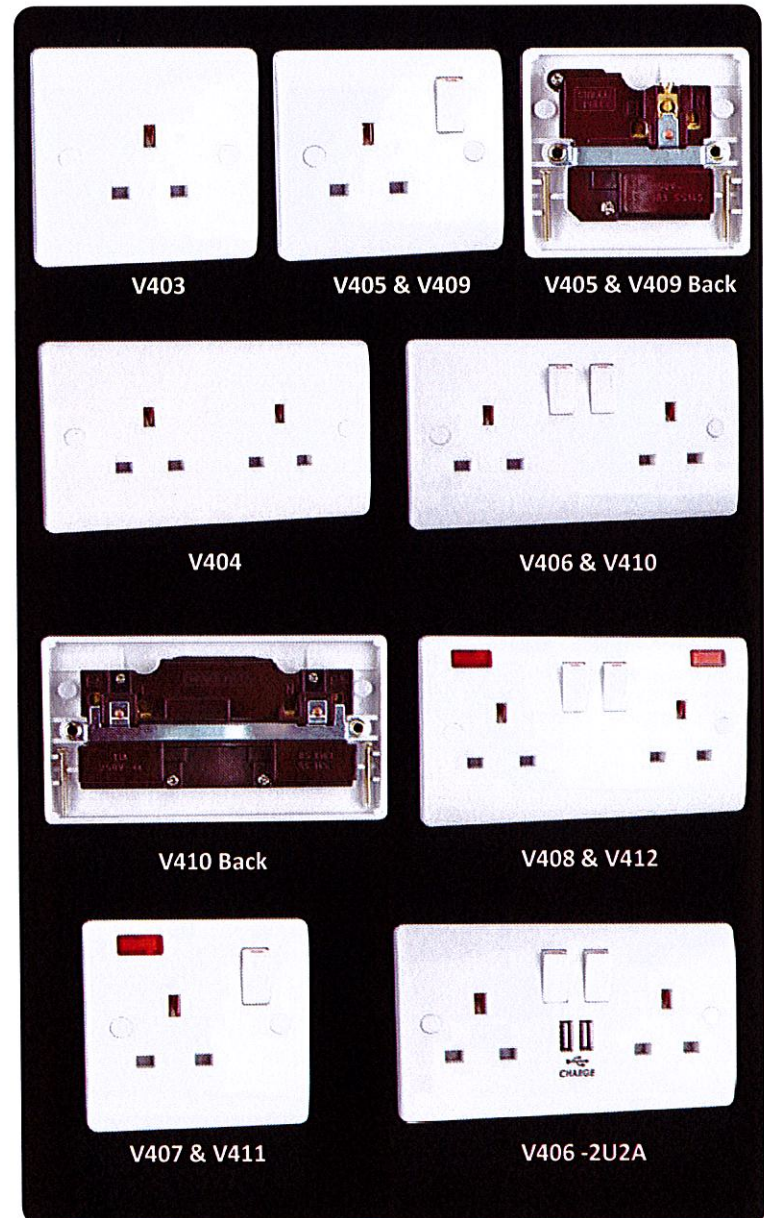


WHITE SOFT EDGES & ROUND CORNERS RANGE

13 Amp Fused Connection Units

ITEM NO.	PRODUCT DESCRIPTIONS
V416	13 Amp Fused Connection Unit
V413	13 Amp Fused Connection Unit, With Neon
V422	13 Amp DP Switched Fused Connection Unit
V419	13 Amp Fused Unit Double Pole With Neon
V416F	13A Fused Connection Unit, W/Flex. Outlet
V413F	13A Fused Spur, W/Flex. Outlet & Neon
V422F	13A DP Switched Fused Unit, W/Flex. Outlet
V419F	13A DP Switched Fused Unit, W/Flex. Out & Neon

Product Features:

- ** Products are conformed to BS 1363, tested by Intertek Shanghai, Test Verification is 130701875SHA-V1;
- ** 13A, 250V, with 4x2.5mm² Terminal Capacity, complete with 2x Earth terminals and Cable Clamp;
- ** With Captive Fuse Carrier for easy change of fuse, supplied with Bussmann Fuse.

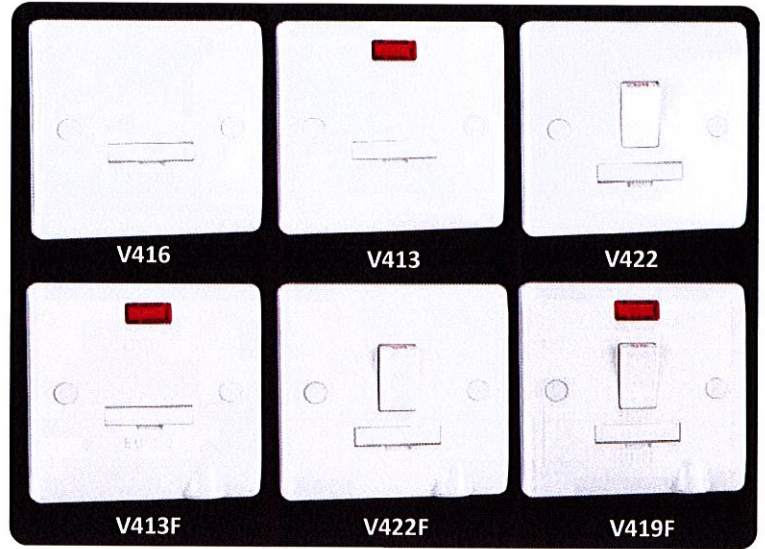


2 Amp/ 5 Amp/ 15 Amp Socket Outlets

ITEM NO.	PRODUCT DESCRIPTIONS
V429	1 Gang 15 Amp Round Pin Switched Socket
V431	1 Gang 15A Round Pin Switched Socket W/Neon
V428	1 Gang 5 Amp Round Pin Switched Socket
V430	1 Gang 5A Round Pin Switched Socket W/Neon
V426	1 Gang 5 Amp Round Pin Unswitched Socket
V455	1 Gang 2 Amp TEL. Socket
V450	2 Gang 15 Amp Switched Socket Double Pole


Product Features:

- ** 15A products are conformed to relevant BS 546, tested by Intertek Shanghai, Test Verification is 130800966SHA-V1.

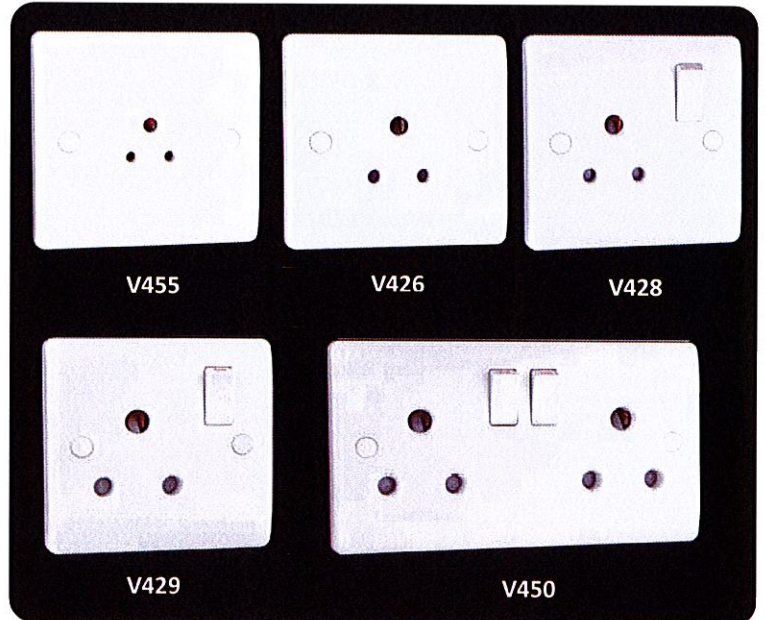

TV and Satellite Socket Outlets

ITEM NO.	PRODUCTS DESCRIPTIONS
V432	1 Gang TV/Coaxial Socket NON-Isolated
V434	1 Gang TV/Coaxial Socket Isolated
V433	2 Gang TV/Coaxial Socket NON-Isolated
V435	2 Gang TV/Coaxial Socket Isolated
V436	1 Gang TV/Coaxial Socket Isolated+Branch
V437	2 Gang TV/Coaxial Socket Isolated+Branch
V469	1 Gang Satellite Socket
V468	Satellite Socket+TV Socket
V470	TEL Socket+TV Socket
V470/A	3 Gang Satellite/TV/FM Socket
V471	1 Gang HI-FI Socket

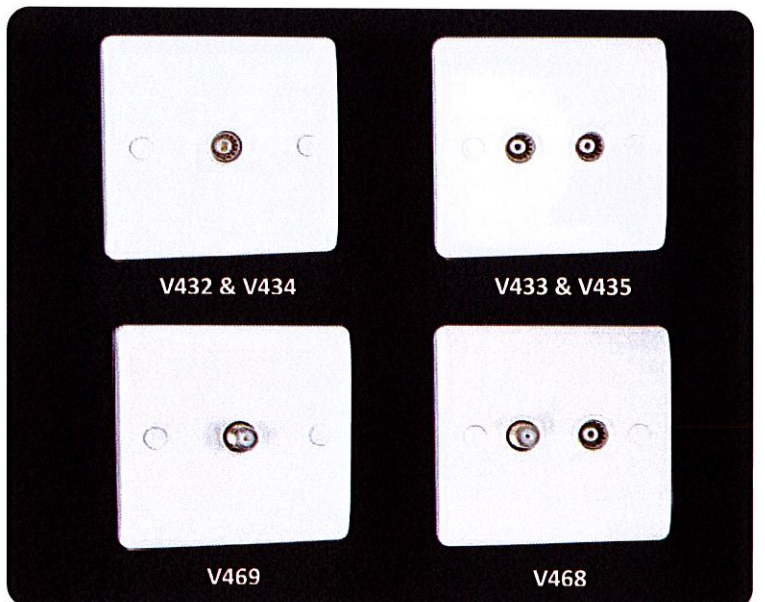


WHITE SOFT EDGES & ROUND CORNERS RANGE

Telephone and Data Sockets

ITEM NO. PRODUCT DESCRIPTIONS


V438	1 Gang TEL Socket Secondary
V439	1 Gang TEL Socket Master
V440	2 Gang TEL Socket Secondary
V441	2 Gang TEL Socket Master
V442RJ11	1 Gang TEL Socket American/A, RJ11
V442RJ45	1 Gang RJ45 Data Socket, 8 Terminal
V443RJ11	2 Gang TEL Socket American/A, RJ11
V443RJ45	2 Gang RJ45 Data Socket, 8 Terminal
V453	1 Gang TEL Socket American/B
V454	2 Gang TEL Socket American/B

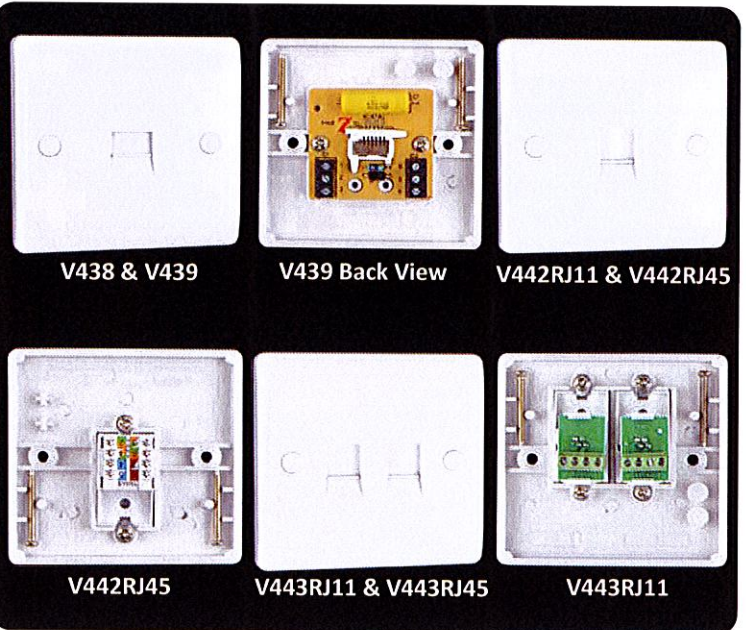

Dimmer Switches

ITEM NO. PRODUCT DESCRIPTIONS

V350	1 Gang 1 Way 250W Dimmer
V351	2 Gang 1 Way 250W Dimmer
V352	3 Gang 1 Way 250W Dimmer 3X6
V353	4 Gang 1 Way 250W Dimmer 3X6
V354	1 Gang 2 Way 250W Dimmer
V355	2 Gang 2 Way 250W Dimmer
V356	3 Gang 2 Way 250W Dimmer 3X6
V357	4 Gang 2 Way 250W Dimmer 3X6
V350/400	1 Gang 1 Way 400W Dimmer
V351/400	2 Gang 1 Way 400W Dimmer
V352/400	3 Gang 1 Way 400W Dimmer 3X6
V353/400	4 Gang 1 Way 400W Dimmer 3X6
V354/400	1 Gang 2 Way 400W Dimmer
V355/400	2 Gang 2 Way 400W Dimmer
V356/400	3 Gang 2 Way 400W Dimmer 3X6
V357/400	4 Gang 2 Way 400W Dimmer 3X6
V350/500	1 Gang 1 Way 500W Dimmer
V351/500	2 Gang 1 Way 500W Dimmer
V352/500	3 Gang 1 Way 500W Dimmer 3X6
V353/500	4 Gang 1 Way 500W Dimmer 3X6
V354/500	1 Gang 2 Way 500W Dimmer
V355/500	2 Gang 2 Way 500W Dimmer
V356/500	3 Gang 2 Way 500W Dimmer 3X6
V357/500	4 Gang 2 Way 500W Dimmer 3X6
V350/1000	1 Gang 1 Way 1000W Dimmer

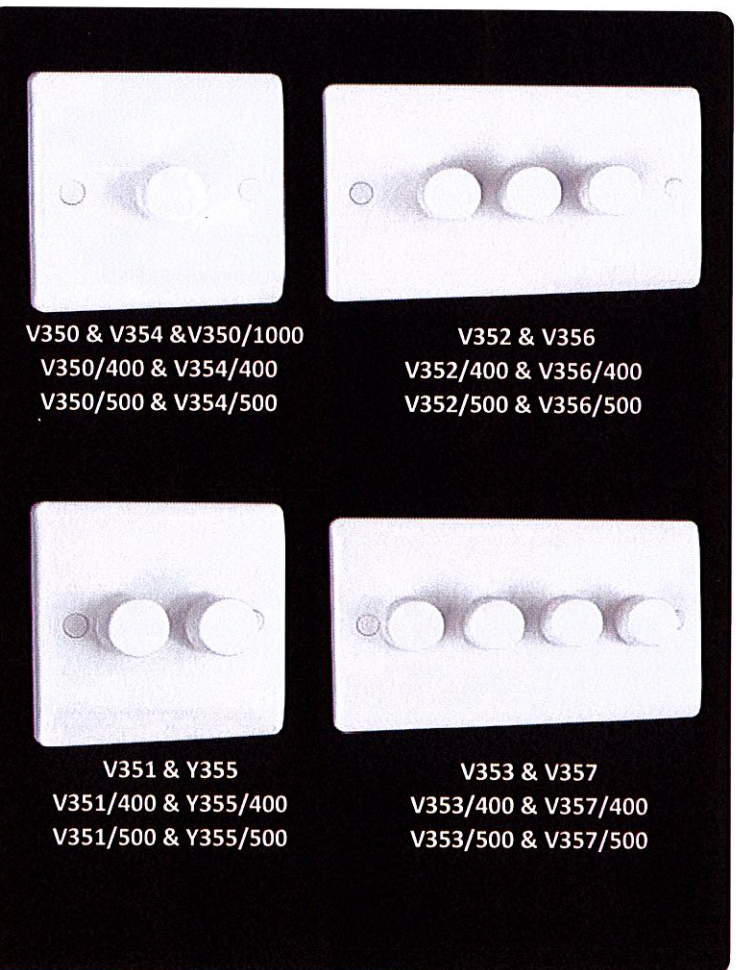

Product Features:

- ** Confrom to EN 50015, EMC Directive;
- ** Push on/off Rotary 2 Way Dimmers.


WHITE SOFT EDGES & ROUND CORNERS RANGE

Round Corners Pattress Boxes

ITEM NO.	PRODUCT DESCRIPTIONS
V342	1G 16mm Architrave Pattress Box
V805	16MM 1 Gang Pattress Box
V806	25MM 1 Gang Pattress Box
V807	35MM 1 Gang Pattress Box
V808	25MM 2X 1Gang Pattress Box
V809	47MM 1 Gang Pattress Box
V343	2G 16mm Architrave Pattress Box
V810	25MM 2 Gang Pattress Box
V811	35MM 2 Gang Pattress Box
V812	47MM 2 Gang Pattress Box, Double Cord Grid

Product Features:

- ** To Standard BS 5733, tested by Intertek Shanghai, Test Verification is 140601709SHA-V1;
- ** Profile to match Range;
- ** One Gang with Fixing Center distance 60.3mm, 2 Gang Fixing Center distance 120.3mm;
- ** 25mm and 35mm Deep products are supplied without earth terminal, for the rest items are all supplied with brass earth terminal;
- ** Items V342 and V343 are matching with our Architrave 2 way switches, please note that the fixing center distances for both items are different from other Pattress boxes, 1G fixing center distance is 64.3mm, and 2G fixing center distance is 124.3mm.

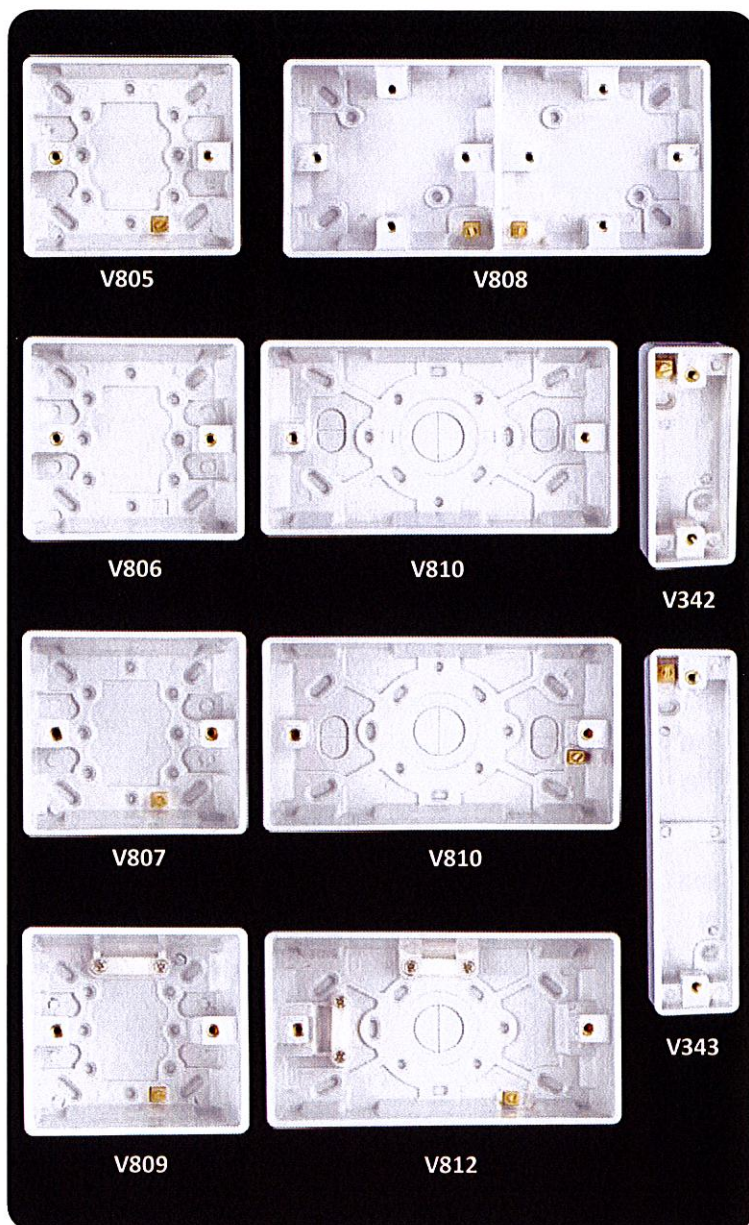

16 Amp Socket Outlets

ITEM NO.	PRODUCT DESCRIPTIONS
V460	16 Amp 1 Gang Multi-Function Socket
V444	16 Amp 2 Gang Socket
V445	16 Amp 1 Gang Socket+20A Single Pole Switch
V460/S	16 Amp 1 Gang Multifunction Socket W/Shutter
V444/S	16 Amp 2 Gang Socket With Shutter
V445/S	16 Amp 1G Socket + 20A S.P. Swith W/Shutter